


PRODUCT CATEGORY
MULTI-SPLIT



Control several indoor units with one outdoor unit. Build the optimum system you desire.

If you want to keep a large floor as well as many rooms comfortable, we recommend you use Multi-split to build a simple system using one outdoor unit. Choose from a large lineup of indoor units that best matches your rooms. You can mix and match them at will. Build the system that is just right for you.

070 Outdoor Units Lineup

072 Connectable Indoor Units

074 5Ticks 3-unit, 4-unit Multi-split

For Singapore

076 2-Unit, 3-Unit, 4-Unit Multi-Split


















078 5-Unit, 6-Unit Multi-Split

080 Indoor Units Specifications

084 Multi-Split Combination Table

102 Feature Summary

Outdoor Units Lineup

Class				18	18	18	24	30	36	45
Cooling rated capacity(kw)				5.0	5.3	5.7	6.8	8.0	10.0	12.5
 5 Ticks 3-unit, 4-unit Multi-split	3-unit Multi-split Up to 3 units		Outdoor unit 		AOAG28JBTA3					
	4-unit Multi-split Up to 4 units		Outdoor unit 			AOAG28JBTA4				
2-unit, 3-unit, 4-unit Multi-split	2-unit Multi-split Up to 2 units		Outdoor unit 	AOAG18LAC2						
	3-unit Multi-split Up to 3 units		Outdoor unit 			AOAG20LBTA3				
			Outdoor unit 				AOAG24LAT3			
	4-unit Multi-split Up to 4 units		Outdoor unit 					AOAG30LAT4		
5-unit, 6-unit, Multi-split	5-unit Multi-split Up to 5 units		Outdoor unit 						AOYG36LBLA5	
	6-unit Multi-split Up to 6 units		Outdoor unit 							AOYG45LBLA6

Note: 1. 2-unit Multi-split:
 Connectable indoor units are 2 units.
 AOAG18LAC2: Total capacity of indoor units connected must be between 4.0 kW and 7.0 kW.

2. 3-unit Multi-split:
 Connectable indoor units are 2 to 3 units.
 AOAG20LBTA3/AOAG24LAT3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.











3. 4-unit Multi-split:
 Connectable indoor units are 3 to 4 units.
 AOAG30LAT4: Total capacity of indoor units connected must be between 7.9 kW and 14.4 kW.

4. 5-unit Multi-split:
 Connectable indoor units are 2 to 5 units
 AOYG36LBLA5: Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.











5. 6-unit Multi-split:
 Connectable indoor units are 2 to 6 units
 AOYG45LBLA6: Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.

Connectable Indoor Units

Type	3-unit	4-unit	2-unit	3-unit		4-unit
Model name	AOAG28JBT A3	AOAG28JBT A4	AOAG18LAC2	AOAG 20LBT A3	AOAG 24LAT3	AOAG30LAT4
Multi-split Type Outdoor Unit	    					
						
Capacity (kW)	Cooling Heating	5.3 -	5.7 -	5.0 5.6	5.2 7.6	6.8 8.0
					8.0 9.6	

Indoor Unit	BTU	kW Class	3-unit	4-unit	2-unit	3-unit	4-unit
 ASAG09/12/GTA	9,000	2.5	●	-	-	-	-
	12,000	3.5	●	●	-	-	-
 ASAG09/GTB	9,000	2.5	-	●	-	-	-
	18,000	5.0	●	●	-	-	-
 ASAG18/FCC	7,000	2.0	-	-	●	●	●
	9,000	2.5	-	-	●	●	●
	12,000	3.5	-	-	●	●	●
 ASAG07/09/12/LMCA	7,000	2.0	-	-	●	●	●
	9,000	2.5	-	-	●	●	●
	12,000	3.5	-	-	●	●	●
 ASAG07/09/12/LUCA	7,000	2.0	-	-	●	●	●
	9,000	2.5	-	-	●	●	●
	12,000	3.5	-	-	●	●	●
 ASAG18/24/LFA	18,000	5.0	-	-	-	●	●
	24,000	7.0	-	-	-	-	●
 AUAG09/12/14/18/LVLA	9,000	2.5	-	-	●	●	●
	12,000	3.5	-	-	●	●	●
	14,000	4.0	-	-	-	●	●
	18,000	5.0	-	-	-	●	●
 ARAG09/12/14/LLLA  ARAG18/LLLA  ARAG24/LLLA	9,000	2.5	-	-	●	●	●
	12,000	3.5	-	-	●	●	●
	14,000	4.0	-	-	-	●	●
	18,000	5.0	-	-	-	●	●
	24,000	7.0	-	-	-	-	●

Type	5-unit	6-unit
Model name	AOYG36LBLA5	AOYG45LBLA6
Multi-split Type Outdoor Unit		
	Capacity (kW)	Cooling Heating
		12.5 13.5

Indoor Unit	BTU	kW Class	5-unit	6-unit
 ASYG07/09/12/14/LUCA	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
 ASYG07/09/12/14/LMCA	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
 ASYG18/24/LFA, ASYG24/LFCC	14,000	4.0	●	●
	18,000	5.0	●	●
	24,000	7.0	●	●
 AGYG09/12/14/LVCA	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
 ABYG14/LVTA, ABYG18/LVTB	14,000	4.0	●	●
	18,000	5.0	●	●
 AUYG07/09/LVLA, AUYG12/14/18/LVLB	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
	18,000	5.0	●	●
 ARYG07/09/LTA, ARYG12/14/LLTB	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
	18,000	5.0	●	●
 ARYG18/LLTB  ARYG07/09/12/14/LSLAP  ARYG18/LSLAP	7,000	2.0	●	●
	9,000	2.5	●	●
	12,000	3.5	●	●
	14,000	4.0	●	●
	18,000	5.0	●	●

3-unit,
4-unit
Multi-split



ALL DC 5 Ticks



3-unit: AOAG28JBTA3
4-unit: AOAG28JBTA4



Specifications (3-unit, 4-unit)

Model No.			AOAG28JBTA3	AOAG28JBTA4
Power Source		V/Ø/Hz	230/1/50	230/1/50
Rated Capacity (Min.-Max.)	Cooling	kW	5.30(1.8-8.5)	5.70(1.8-8.5)
	Heating	kW	-	-
Sound Pressure Level	Cooling	dB(A)	49	50
	Heating	dB(A)	-	-
Net Dimensions H x W x D		mm	700 x 900 x 330	700 x 900 x 330
Weight		kg(lbs)	54(119)	54(119)
Connection Pipe Diameter	Liquid	mm	Ø6.35	Ø6.35
	Gas	mm	Ø9.52	Ø9.52
Max. Pipe Length		Total / Each	50/25	50/25
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.	m	15	15
	Between Indoor Units.	m	10	10
Operation Range	Cooling	°CDB	10 to 46	10 to 46
	Heating	°CDB	-	-
Refrigerant			R410A	R410A

New, highly energy-saving air conditioner suitable for the residential use

Equipped with large capacity DC compressor, the compact air conditioner realizes Tick 5 energy saving performance.



AOAG28JBTA3



AOAG28JBTA4

New indoor unit line up


A new wall mounted model has been added to the lineup. The new model is a slim and stylish square design that harmonize with the interior.



Human sensor*

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to previous operating mode.

*:09/12 models only

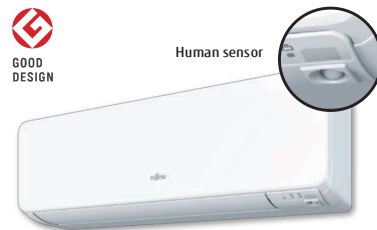

Compact outdoor unit

The outdoor unit measures 700mm tall, so it does not spoil the view. It also supports installation on HDB*

*:Housing Development Board





Smart Device Control (Option)

Easy air conditioner control from inside or outside the house and office using the Smartphones, Tablets, and PC.




Dimensions

(Unit : mm)

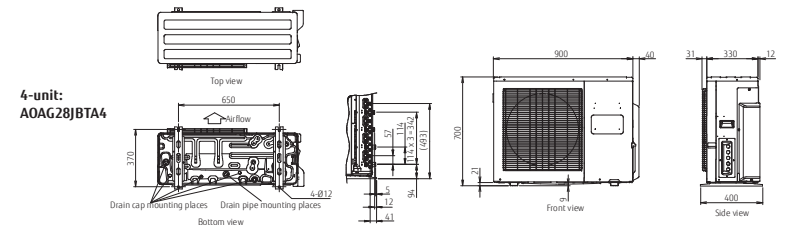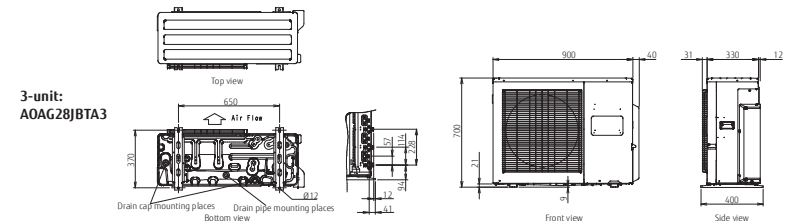

2-unit,
3-unit,
4-unit
Multi-split

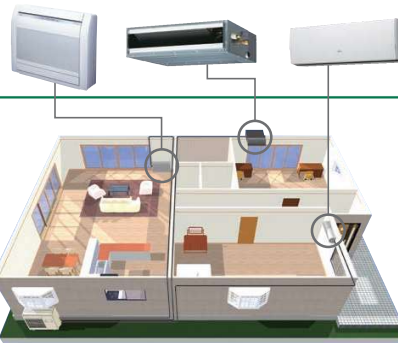


Wide range of indoor units with various models

3 types / 17 models are lined up in the capacity range from 2.0 kW to 4.0 kW class. Wide range of requirements can be realized from in private homes, large shops and hotels.


Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.



Flexible installation

Up to max. piping length of 70 m (AOAG30LAT4), max. height difference of 15 m can be supported. Multi-split type can be installed in large-size residence or buildings with multiple floors.

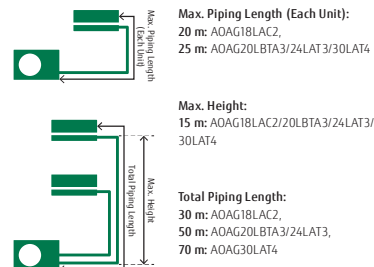

2-unit: AOAG18LAC2
3-unit: AOAG20LBT3 / AOAG24LAT3
4-unit: AOAG30LAT4



Specifications (2-unit, 3-unit, 4-unit)


Model No.			AOAG18LAC2	AOAG20LBT3	AOAG24LAT3	AOAG30LAT4
Power Source	V/Ø/Hz		230/1/50	230/1/50	230/1/50	230/1/50
Rated Capacity (Min.-Max.)	Cooling	kW	5.0(1.7-5.6)	5.7(1.8-8.5)	6.8(1.8-8.5)	8.0 (3.5-10.1)
	Heating	kW	5.6(1.8-6.1)	7.8(2.0-9.2)	8.0(2.0-9.2)	9.6 (3.7-12.0)
Sound Pressure Level	Cooling	dB(A)	51	49	50	50
	Heating	dB(A)	51	51	51	51
Net Dimensions H × W × D	mm		540 × 790 × 290	700 × 900 × 330	700 × 900 × 330	830 × 900 × 330
Weight	kg(lbs)		38(83.8)	55(121.3)	55(121.3)	68 (150)
Connection Pipe Diameter	Liquid	mm	Ø6.35 × 2	Ø6.35 × 3	Ø6.35 × 3	Ø6.35 × 4 (*Ø6.35x3, Ø9.52)
	Gas	mm	Ø9.52 × 2	Ø9.52 × 2, Ø12.70	Ø9.52 × 2, Ø12.70	Ø9.52 × 2, Ø12.70 × 2
Max. Pipe Length	Total / Each	m	30 / 20	50 / 25	50 / 25	70 / 25
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.	m	15	15	15	15
	Between Indoor Units.	m	10	10	10	10
Operation Range	Cooling	°CDB	10 to 46	10 to 46	10 to 46	10 to 46
	Heating	°CDB	-10 to 24	-10 to 24	-10 to 24	-10 to 24
Refrigerant			R410A	R410A	R410A	R410A

Note: Specifications are based on the following conditions.
 • Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
 • Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
 • Pipe length: 5m, Height difference: 0m. (Outdoor unit - indoor unit)
 *Connect to connection valve by the adapter.


Dimensions

(Unit : mm)


2-unit:
AOAG18LAC2

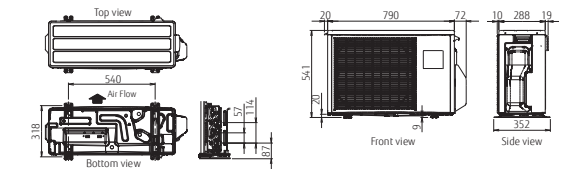

3-unit:
AOAG20LBT3 / AOAG24LAT3

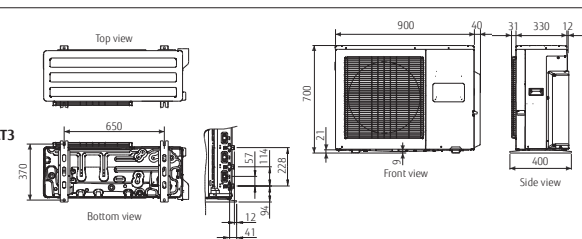

4-unit:
AOAG30LAT4

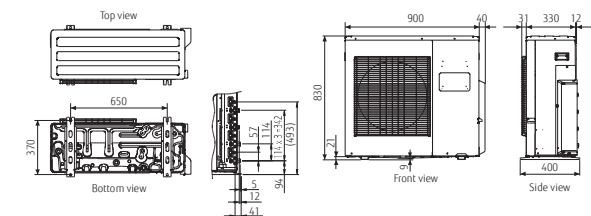


5-unit,
6-unit
Multi-split



Wide range of indoor units with various models

5 types / 30 models are lined up in the capacity range from 2.0 kW to 7.0 kW class. Wide range of requirements can be realized from in private homes, large shops and hotels.

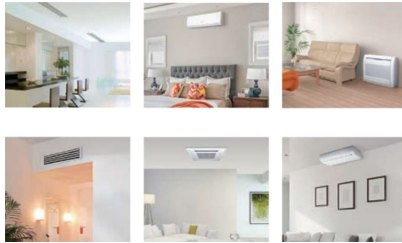


Compact design

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.



Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once



Central & Individual Control

- Batched control of up to 6 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.
- Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)
- Large backlight LED screen
- Large easy-to-see operation panel

Maximum Controllable
1 multi-split system

Maximum Controllable
6 indoor units



5-unit: AOYG36LBLA5
6-unit: AOYG45LBLA6




Specifications (5-unit, 6-unit)

Model No.			AOYG36LBLA5	AOYG45LBLA6
Power Source		V/Ø/Hz	230/1/50	230/1/50
Rated Capacity (Min.-Max.)	Cooling	kW	10.0 (3.5-12.5)	12.5 (3.5-14.0)
	Heating	kW	12.0 (3.5-14.0)	13.5 (3.5-16.0)
Sound Pressure Level	Cooling	dB(A)	53	53
	Heating	dB(A)	55	55
Net Dimensions H × W × D		mm	998 × 970 × 370	998 × 970 × 370
Weight		kg (lbs)	94 (207)	94 (207)
Connection Pipe Diameter	Liquid	mm	Ø6.35 × 5	Ø6.35 × 6
	Gas	mm	Ø9.52 × 3, Ø12.70 × 2	Ø9.52 × 4, Ø12.70 × 2
Max. Pipe Length	Total / Each	m	80 / 25	80 / 25
	Between Outdoor Unit and Each Indoor Units.	m	15	15
Max. Height Difference	Between Outdoor Unit and Each Indoor Units.	m	10	10
	Between Indoor Units.	m	10	10
Operation Range	Cooling	°CDB	-10 to 46	-10 to 46
	Heating	°CDB	-15 to 24	-15 to 24
Refrigerant			R410A	R410A

Dimensions

(Unit : mm)

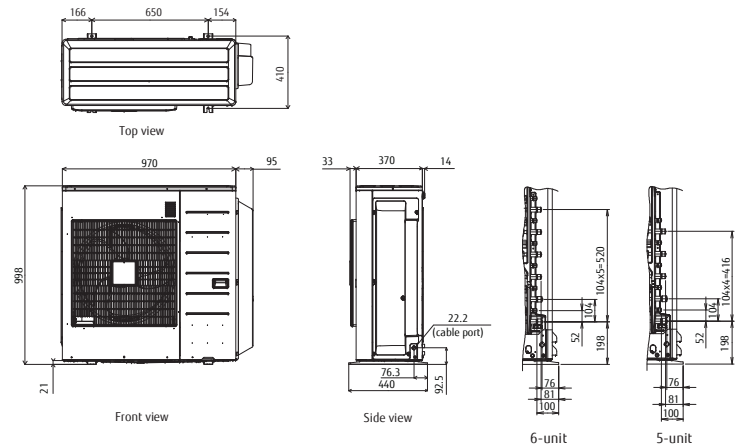

2-unit to 4-unit Multi-split Indoor Units Specifications

Wall mounted



Model No.	Indoor unit			ASAG09JGTA	ASAG12JGTA
kW Class				2.5	3.5
Power Source				230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/36/30/21	44/37/30/21
	Heating			-	-
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	770/560/430/250	800/600/450/250
	Heating			-	-
Net Dimensions				270 × 834 × 215	270 × 834 × 215
Weight				10(22)	10(22)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø9.52	Ø6.35/Ø9.52

Wall mounted



Model No.	Indoor unit			ASAG09JGTB
kW Class				2.5
Power Source				230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	40/34/29/21
	Heating			-
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	700/560/430/270
	Heating			-
Net Dimensions				270 × 834 × 215
Weight				10(22)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø9.52

Wall mounted



Model No.	Indoor unit			ASAG18JFCC
kW Class				5.0
Power Source				230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/37/33/26
	Heating			-
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	900/740/620/550
	Heating			-
Net Dimensions				320 × 998 × 238
Weight				14(30.9)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø12.70

Wall mounted



Model No.	Indoor unit			ASAG07LMCA	ASAG09LMCA	ASAG12LMCA
kW Class				2.0	2.5	3.5
Power Source				230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/32/29/21	37/33/29/21	40/36/30/21
	Heating			36/32/29/22	37/33/29/22	40/36/31/22
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	560/500/430/310	600/520/430/310	660/560/450/310
	Heating			560/500/430/330	600/520/430/330	660/560/470/330
Net Dimensions				268 × 840 × 203	268 × 840 × 203	268 × 840 × 203
Weight				8.5(18.7)	8.5(18.7)	8.5(18.7)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52

Wall mounted



Model No.	Indoor unit			ASVG07LUCA	ASVG09LUCA	ASVG12LUCA
kW Class				2.0	2.5	3.5
Power Source				230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	35/30/28/21	36/32/28/21	37/34/31/21
	Heating			35/30/28/21	36/32/28/21	37/34/31/21
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	570/520/470/330	600/550/470/330	660/600/530/330
	Heating			570/520/470/330	600/550/470/330	660/600/530/330
Net Dimensions				282 × 870 × 185	282 × 870 × 185	282 × 870 × 185
Weight				9.5(20.9)	9.5(20.9)	9.5(20.9)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52

Wall mounted



Model No.	Indoor unit			ASAG18LFCA	ASAG24LFCA
kW Class				5.0	7.0
Power Source				230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/37/33/26	49/42/37/33
	Heating			42/37/33/25	48/42/37/33
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	900/740/620/550	1120/900/740/620
	Heating			900/740/620/550	1100/900/740/620
Net Dimensions				320 × 998 × 238	320 × 998 × 238
Weight				14(30.9)	14(30.9)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø12.70	Ø6.35/Ø15.88

Compact cassette



Model No.	Indoor unit			AUAG09LVLA	AUAG12LVLA	AUAG14LVLA	AUAG18LVLA
kW Class				2.5	3.5	4.0	5.0
Power Source				230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
	Heating			34/32/29/27	37/33/31/28	40/37/34/29	44/40/37/30
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
	Heating			540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Net Dimensions				245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight				15(33.1)	15(33.1)	15(33.1)	15(33.1)
Cassette Grille				UTC-UFYD-W	UTC-UFYD-W	UTC-UFYD-W	UTC-UFYD-W
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70	Ø6.35/Ø12.70

Slim duct



Model No.	Indoor unit			ARAG09LALLA	ARAG12LALLA	ARAG14LALLA	ARAG18LALLA	ARAG24LALLA
kW Class				2.5	3.5	4.0	5.0	7.0
Power Source				230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29	33/32/30/29
	Heating			28/26/25/24	29/28/27/24	33/30/28/25	33/32/31/29	35/34/32/29
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750	1330/1240/1100/1030
	Heating			600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750	1330/1240/1100/1030
Net Dimensions				198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	198 × 1,100 × 620
Weight				19(41.9)	19(41.9)	19(41.9)	23(50.7)	27(59.5)
Connection Pipe Diameter	Liquid/Gas			Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70	Ø6.35/Ø12.70	Ø6.35/Ø15.88
External static pressure				0 to 90	0 to 90	0 to 90	0 to 90	0 to 50
Drain pump				Standard	Standard	Standard	Standard	Standard

5-unit, 6-unit Multi-split Indoor Units Specifications

Wall mounted



Model No.	Indoor unit		kW	ASVG07LUCA	ASVG09LUCA	ASVG12LUCA	ASVG14LUCA
kW Class			kW	2.0	2.5	3.5	4.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	35/30/28/21	36/32/28/21	37/34/31/21	41/36/33/25
	Heating			35/30/28/21	36/32/28/21	37/34/31/21	41/36/34/27
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	570/520/470/330	600/550/470/330	660/600/530/330	710/640/570/390
	Heating			570/520/470/330	600/550/470/330	660/600/530/330	710/640/590/430
Net Dimensions			mm	282 × 870 × 185	282 × 870 × 185	282 × 870 × 185	282 × 870 × 185
Weight			kg(lbs)	9.5 (20.9)	9.5 (20.9)	9.5 (20.9)	9.5 (20.9)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70

Wall mounted



Model No.	Indoor unit		kW	ASVG07LMCA	ASVG09LMCA	ASVG12LMCA	ASVG14LMCA
kW Class			kW	2.0	2.5	3.5	4.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/32/29/21	37/33/29/21	40/36/30/21	42/38/33/25
	Heating			36/32/29/22	37/33/29/22	40/36/31/22	42/38/35/27
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	560/500/430/310	600/520/430/310	660/560/450/310	730/600/530/360
	Heating			560/500/430/310	600/520/430/310	660/560/470/310	730/615/560/375
Net Dimensions			mm	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203
Weight			kg(lbs)	8.5 (18.7)	8.5 (18.7)	8.5 (18.7)	8.5 (18.7)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70

Wall mounted



Model No.	Indoor unit		kW	ASVG18LFCA	ASVG24LFCA	ASVG24LFCC
kW Class			kW	5.0	7.0	7.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/37/33/26	49/42/37/33	49/42/37/33
	Heating			42/37/33/25	48/42/37/33	48/42/37/33
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	900/740/620/550	1,120/900/740/620	1,120/900/740/620
	Heating			900/740/620/550	1,100/900/740/620	1,100/900/740/620
Net Dimensions			mm	320 × 998 × 238	320 × 998 × 238	320 × 998 × 238
Weight			kg(lbs)	14 (30.9)	14 (30.9)	14 (30.9)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø12.70	Ø6.35/Ø15.88

Floor



Model No.	Indoor unit		kW	AGYG09LVCA	AGYG12LVCA	AGYG14LVCA
kW Class			kW	2.5	3.5	4.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	39/34/28/22	42/36/30/22	44/38/31/22
	Heating			39/35/30/22	42/38/32/22	44/39/33/22
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	530/440/360/270	600/490/380/270	650/520/400/270
	Heating			530/460/380/270	600/510/410/270	650/540/430/270
Net Dimensions			mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
Weight			kg(lbs)	14 (30.9)	14 (30.9)	14 (30.9)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø9.52	Ø6.35/Ø12.70

Floor/ceiling



Model No.	Indoor unit		kW	ABYG14LVTA	ABYG18LVTB
kW Class			kW	4.0	5.0
Power Source			V/Ø/Hz	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/34/33/29 (Under ceiling) / 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) / 44/41/37/35 (Floor console)
	Heating			36/34/33/29 (Under ceiling) / 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) / 44/41/37/35 (Floor console)
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	640/590/540/480	780/700/560/500
	Heating			640/590/540/480	780/700/560/500
Net Dimensions			mm	199 × 990 × 655	199 × 990 × 655
Weight			kg(lbs)	27 (59.5)	27 (59.5)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø12.70

Compact cassette




Model No.	Indoor unit		kW	AUYG07LVLA	AUYG09LVLA	AUYG12LVLB	AUYG14LVLB	AUYG18LVLB
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
	Heating			34/32/29/27	34/32/29/27	37/33/31/28	40/37/34/29	44/40/37/30
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Net Dimensions			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight			kg(lbs)	15(33.1)	15 (33.1)	15 (33.1)	15 (33.1)	15 (33.1)
Cassette Grille				UTG-UFYD-W	UTG-UFYD-W	UTG-UFYD-W	UTG-UFYD-W	UTG-UFYD-W
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70	Ø6.35/Ø12.70

Slim duct



Model No.	Indoor unit		kW	ARYG07LLTA	ARYG09LLTA	ARYG12LLTB	ARYG14LLTB	ARYG18LLTB
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29
	Heating			28/26/25/24	28/26/25/24	29/28/27/26	33/30/28/25	33/32/31/29
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimensions			mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
Weight			kg(lbs)	17 (37.5)	19 (41.9)	19 (41.9)	19 (41.9)	23 (50.7)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70	Ø6.35/Ø12.70
External static pressure				0 to 90	0 to 90	0 to 90	0 to 90	0 to 90
Drain pump				Standard	Standard	Standard	Standard	Standard

Mini duct



Model No.	Indoor unit		kW	ARYG07LSLAP	ARYG09LSLAP	ARYG12LSLAP	ARYG14LSLAP	ARYG18LSLAP
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source			V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
Airflow Rate	Cooling	H/M/L/Q	m ³ /h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
Net Dimensions			mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450
Weight			kg(lbs)	15.5 (34.2)	15.5 (34.2)	15.5 (34.2)	15.5 (34.2)	18.5 (40.8)
Connection Pipe Diameter	Liquid/Gas			mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.70	Ø6.35/Ø12.70
External static pressure				0 to 30	0 to 30	0 to 30	0 to 50	0 to 50
Drain pump				Standard	Standard	Standard	Standard	Standard

3-unit, 4-unit Multi-split Combination Table-Cooling

3-unit Multi-split cooling

AOAG28/BTA3	Combination of indoor unit				Cooling Operation						EER (W/W)
					Cooling Capacity				Input Power (Min.-Max.)		
	Unit 1	Unit 2	Unit 3	Total	Unit 1	Unit 2	Unit 3	Total (Min.-Max.)	Unit 1	Unit 2	
3-unit connection	9	-	-	9	2.70	-	-	2.7(1.5-3.3)	0.67(0.45-1.09)	-	4.04
	12	-	-	12	3.50	-	-	3.5(1.5-3.7)	0.91(0.45-1.15)	-	3.83
	18	-	-	18	5.00	-	-	5.0(1.8-5.6)	1.26(0.50-1.96)	-	3.98
	9	9	-	18	2.65	2.65	-	5.3(1.8-6.2)	1.25(0.50-2.02)	-	4.24
	9	12	-	21	2.27	3.03	-	5.3(1.8-6.8)	1.28(0.50-2.45)	-	4.13
	9	18	-	27	1.76	3.53	-	5.3(1.8-7.9)	1.14(0.50-2.87)	-	4.66
	12	12	-	24	2.65	2.65	-	5.3(1.8-7.2)	1.26(0.50-2.74)	-	4.20
	12	18	-	30	2.12	3.18	-	5.3(1.8-7.9)	1.14(0.50-2.87)	-	4.66
	9	9	9	27	1.77	1.77	1.77	5.3(1.8-8.2)	1.09(0.50-2.87)	-	4.86
	9	9	12	30	1.59	1.59	2.12	5.3(1.8-8.3)	1.09(0.50-2.87)	-	4.86
	9	9	18	36	1.33	1.33	2.64	5.3(2.0-8.5)	1.09(0.50-2.87)	-	4.86
	9	12	12	33	1.45	1.93	1.93	5.3(1.8-8.3)	1.09(0.50-2.87)	-	4.86
	12	12	12	36	1.77	1.77	1.77	5.3(1.8-8.3)	1.09(0.50-2.87)	-	4.86

Note: •9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling: Indoor temperature of 27 °CDB/19 °CWB and outdoor temperature of 35 °CDB.
 •Pipe length: 5 m, Height difference: 0 m (Outdoor unit-Indoor unit)
 •The total ability of connected indoor units is from 14,000 Btu up to 36,000 Btu.

4-unit Multi-split cooling

AOAG28/BTA3	Combination of indoor unit					Cooling Operation						EER (W/W)	
						Cooling Capacity					Input Power (Min.-Max.)		
	Unit 1	Unit 2	Unit 3	Unit 4	Total	Unit 1	Unit 2	Unit 3	Unit 4	Total (Min.-Max.)	Unit 1		Unit 2
1-unit connection	9	-	-	-	9	2.70	-	-	-	2.7(1.5-3.3)	0.67(0.45-1.09)	-	4.03
	12	-	-	-	12	3.50	-	-	-	3.5(1.5-3.7)	0.91(0.45-1.19)	-	3.85
	18	-	-	-	18	5.00	-	-	-	5.0(1.8-5.6)	1.26(0.50-1.96)	-	3.97
2-unit connection	9	9	-	-	18	2.65	2.65	-	-	5.3(1.8-6.2)	1.25(0.50-2.02)	-	4.24
	9	12	-	-	21	2.27	3.03	-	-	5.3(1.8-6.8)	1.28(0.50-2.45)	-	4.14
	9	18	-	-	27	1.76	3.53	-	-	5.3(1.8-7.9)	1.14(0.50-2.87)	-	4.65
3-unit connection	12	12	-	-	24	2.65	2.65	-	-	5.3(1.8-7.2)	1.26(0.50-2.74)	-	4.21
	12	18	-	-	30	2.12	3.18	-	-	5.3(1.8-7.9)	1.14(0.50-2.87)	-	4.65
	9	9	9	-	27	1.77	1.77	1.77	-	5.3(1.8-8.2)	1.09(0.50-2.87)	-	4.86
	9	9	12	-	30	1.59	1.59	2.12	-	5.3(1.8-8.3)	1.09(0.50-2.87)	-	4.86
	9	9	18	-	36	1.33	1.33	2.64	-	5.3(2.0-8.5)	1.09(0.50-2.87)	-	4.86
	9	12	12	-	33	1.45	1.93	1.93	-	5.3(1.8-8.3)	1.09(0.50-2.87)	-	4.86
4-unit connection	9	12	18	-	39	1.22	1.63	2.45	-	5.3(2.0-8.5)	1.09(0.50-2.87)	-	4.86
	12	12	12	-	36	1.77	1.77	1.77	-	5.3(1.8-8.3)	1.09(0.50-2.87)	-	4.86
	12	12	18	-	42	1.51	1.51	2.27	-	5.3(2.0-8.5)	1.09(0.50-2.87)	-	4.86
	9	9	9	9	36	1.43	1.43	1.43	1.43	5.7(1.8-8.5)	1.17(0.50-2.87)	-	4.86
	9	9	9	12	39	1.32	1.32	1.32	1.75	5.7(1.8-8.5)	1.17(0.50-2.87)	-	4.86
	9	9	9	18	45	1.14	1.14	1.14	2.28	5.7(2.0-8.5)	1.17(0.50-2.87)	-	4.86

Note: •9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling: Indoor temperature of 27 °CDB/19 °CWB and outdoor temperature of 35 °CDB.
 •Pipe length: 5 m, Height difference: 0 m (Outdoor unit-Indoor unit)

2-unit, 3-unit Multi-split Combination Table-Cooling

2-unit Multi-split cooling

AOAG1BLAC2	Combination of Indoor unit			Cooling Operation				EER (W/W)
				Cooling Capacity			Input Power (Min.-Max.) kW	
	Unit 1	Unit 2	Total	Unit 1	Unit 2	Total (Min.-Max.)		
2-unit connection	7	7	14	2.10	2.10	4.20(1.70-5.20)	1.24(0.35-1.68)	3.39
	7	9	16	2.10	2.50	4.60(1.70-5.30)	1.26(0.35-1.79)	3.65
	7	12	19	1.90	3.10	5.00(1.70-5.60)	1.48(0.35-1.95)	3.38
	9	9	18	2.50	2.50	5.00(1.70-5.60)	1.49(0.35-1.95)	3.36
	9	12	21	2.10	2.90	5.00(1.70-5.70)	1.48(0.35-1.95)	3.38
	12	12	24	2.50	2.50	5.00(1.70-5.80)	1.49(0.35-1.99)	3.36

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling capacity is based on 27°CDB/19°CWB (Indoor temperature), 35°CDB (outdoor temperature).
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
 •The total ability of connected indoor unit is up to 24,000 Btu from 14,000 Btu.

3-unit Multi-split cooling

AOAG20LBT3	Combination of Indoor unit				Cooling Operation				EER (W/W)	
					Cooling Capacity			Input Power (Min.-Max.) kW		
	Unit 1	Unit 2	Unit 3	Total (Min.-Max.)	Unit 1	Unit 2	Unit 3			Total (Min.-Max.)
2-unit connection	7	7	-	14	2.30	2.30	-	4.6(1.8-5.0)	1.20(0.50-1.40)	3.83
	7	9	-	16	2.30	2.70	-	5.0(1.8-5.7)	1.36(0.50-1.78)	3.68
	7	12	-	19	2.34	3.36	-	5.7(1.8-6.1)	1.65(0.50-1.97)	3.45
	7	14	-	21	2.08	3.62	-	5.7(1.8-7.2)	1.55(0.50-2.46)	3.68
	7	18	-	25	1.80	3.90	-	5.7(1.8-7.8)	1.51(0.50-2.87)	3.77
	9	9	-	18	2.75	2.75	-	5.5(1.8-6.2)	1.55(0.50-2.02)	3.55
	9	12	-	21	2.57	3.14	-	5.7(1.8-6.8)	1.65(0.50-2.45)	3.46
	9	14	-	23	2.30	3.40	-	5.7(1.8-7.7)	1.50(0.50-2.77)	3.80
	9	18	-	27	2.00	3.70	-	5.7(1.8-7.9)	1.46(0.50-2.87)	3.90
	12	12	-	24	2.85	2.85	-	5.7(1.8-7.2)	1.62(0.50-2.74)	3.52
	12	14	-	26	2.58	3.12	-	5.7(1.8-7.8)	1.46(0.50-2.87)	3.90
	12	18	-	30	2.27	3.43	-	5.7(1.8-7.9)	1.46(0.50-2.87)	3.90
3-unit connection	7	7	7	21	1.90	1.90	1.90	5.7(1.8-7.4)	1.40(0.50-2.37)	4.07
	7	7	9	23	1.80	1.80	2.11	5.7(1.8-7.8)	1.40(0.50-2.60)	4.07
	7	7	12	26	1.66	1.66	2.38	5.7(1.8-8.1)	1.40(0.50-2.87)	4.07
	7	7	14	28	1.52	1.52	2.65	5.7(2.0-8.4)	1.40(0.60-2.87)	4.07
	7	7	18	32	1.37	1.37	2.97	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
	7	9	9	25	1.70	2.00	2.00	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
	7	9	12	28	1.58	1.85	2.27	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
	7	9	14	30	1.46	1.71	2.53	5.7(2.0-8.4)	1.40(0.60-2.87)	4.07
	7	9	18	34	1.31	1.54	2.85	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
	7	12	12	31	1.47	2.11	2.11	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
	7	12	14	33	1.37	1.96	2.38	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
	9	9	9	27	1.90	1.90	1.90	5.7(1.8-8.2)	1.40(0.50-2.87)	4.07
	9	9	12	30	1.77	1.77	2.16	5.7(1.8-8.3)	1.40(0.50-2.87)	4.07
	9	9	14	32	1.64	1.64	2.43	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
	9	9	18	36*1	1.48	1.48	2.74	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
	9	12	12	33	1.65	2.02	2.02	5.7(1.8-8.3)	1.40(0.50-2.87)	4.07
	9	12	14	35	1.54	1.88	2.28	5.7(2.0-8.5)	1.40(0.60-2.87)	4.07
	12	12	12	36	1.90	1.90	1.90	5.7(1.8-8.3)	1.40(0.50-2.87)	4.07

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling: Indoor temperature of 27°CDB/19°CWB and outdoor temperature of 35°CDB.
 •Pipe length: 5 m, Height difference: 0 m (Outdoor unit - Indoor unit)
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.
 *1: When ASAG1BLFCA is connected, 9,000 Btu model shall be chosen at least one "Compact wall mounted type" or more.

3-unit Multi-split cooling

AOAG24LAT3	Combination of Indoor unit				Cooling Operation				EER (W/W)	
					Cooling Capacity			Input Power (Min.-Max.) kW		
	Unit 1	Unit 2	Unit 3	Total (Min.-Max.)	Unit 1	Unit 2	Unit 3			Total (Min.-Max.)
2-unit connection	7	7	-	14	2.30	2.30	-	4.6(1.8-5.0)	1.20(0.50-1.40)	3.83
	7	9	-	16	2.30	2.70	-	5.0(1.8-5.7)	1.36(0.50-1.78)	3.68
	7	12	-	19	2.38	3.42	-	5.8(1.8-6.1)	1.70(0.50-1.97)	3.41
	7	14	-	21	2.37	4.13	-	6.5(1.8-7.2)	1.91(0.50-2.46)	3.40
	7	18	-	25	2.08	4.52	-	6.6(1.8-7.8)	1.91(0.50-2.87)	3.46
	9	9	-	18	2.75	2.75	-	5.5(1.8-6.2)	1.55(0.50-2.02)	3.55
	9	12	-	21	2.79	3.41	-	6.2(1.8-6.8)	1.90(0.50-2.45)	3.26
	9	14	-	23	2.66	3.94	-	6.6(1.8-7.7)	1.91(0.50-2.77)	3.46
	9	18	-	27	2.35	4.35	-	6.7(1.8-7.9)	1.91(0.50-2.77)	3.51
	12	12	-	24	3.15	3.15	-	6.3(1.8-7.2)	1.90(0.50-2.74)	3.32
	12	14	-	26	3.03	3.67	-	6.7(1.8-7.8)	1.91(0.50-2.87)	3.51
	12	18	-	30	2.66	4.04	-	6.7(1.8-7.9)	1.92(0.50-2.87)	3.49
3-unit connection	7	7	7	21	2.27	2.27	2.27	6.8(1.8-7.4)	1.92(0.50-2.37)	3.54
	7	7	9	23	2.14	2.14	2.52	6.8(1.8-7.8)	1.93(0.50-2.60)	3.52
	7	7	12	26	1.98	1.98	2.84	6.8(1.8-8.1)	1.93(0.50-2.87)	3.52
	7	7	14	28	1.82	1.82	3.16	6.8(2.0-8.4)	1.94(0.60-2.87)	3.51
	7	7	18	32	1.63	1.63	3.54	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
	7	9	9	25	2.03	2.38	2.38	6.8(1.8-8.2)	1.93(0.50-2.87)	3.52
	7	9	12	28	1.88	2.21	2.70	6.8(1.8-8.2)	1.93(0.50-2.87)	3.52
	7	9	14	30	1.74	2.04	3.02	6.8(2.0-8.4)	1.94(0.60-2.87)	3.51
	7	9	18	34	1.56	1.84	3.40	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
	7	12	12	31	1.76	2.52	2.52	6.8(1.8-8.2)	1.94(0.50-2.87)	3.51
	7	12	14	33	1.63	2.34	2.83	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
	9	9	9	27	2.27	2.27	2.27	6.8(1.8-8.2)	1.94(0.50-2.87)	3.51
	9	9	12	30	2.11	2.11	2.58	6.8(1.8-8.3)	1.94(0.50-2.87)	3.51
	9	9	14	32	1.95	1.95	2.89	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
	9	9	18	36*1	1.77	1.77	3.27	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
	9	12	12	33	1.97	2.41	2.41	6.8(1.8-8.3)	1.94(0.50-2.87)	3.51
	9	12	14	35	1.84	2.24	2.72	6.8(2.0-8.5)	1.94(0.60-2.87)	3.51
	12	12	12	36	2.27	2.27	2.27	6.8(1.8-8.3)	1.94(0.50-2.87)	3.51

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling: Indoor temperature of 27°CDB/19°CWB and outdoor temperature of 35°CDB.
 •Pipe length: 5 m, Height difference: 0 m (Outdoor unit - Indoor unit)
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.
 *1: When ASAG1BLFCA is connected, 9,000 Btu model shall be chosen at least one "Compact wall mounted type" or more.

2-unit, 3-unit Multi-split Combination Table-Heating

2-unit Multi-split heating

AOAG1BLAC2	Combination of Indoor unit			Heating Operation				COP (W/W)
				Heating Capacity			Input Power (Min.-Max.) kW	
	Unit 1 kW	Unit 2 kW	Total (Min.-Max.) kW					
2-unit connection	7	7	14	2.70	2.70	5.40(1.80-6.00)	1.24(0.35-1.68)	3.39
	7	9	16	2.50	3.00	5.50(1.80-6.00)	1.26(0.35-1.79)	3.65
	7	12	19	2.30	3.30	5.60(1.80-6.10)	1.48(0.35-1.95)	3.38
	9	9	18	2.80	2.80	5.60(1.80-6.10)	1.49(0.35-1.95)	3.36
	9	12	21	2.45	3.15	5.60(1.80-6.20)	1.48(0.35-1.95)	3.38
	12	12	24	2.80	2.80	5.60(1.80-6.30)	1.49(0.35-1.99)	3.36

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Heating capacity is based on 20°CDB (indoor temperature), 7°CDB / 6°CWB (outdoor temperature).
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
 •The total ability of connected indoor unit is up to 24,000 Btu from 14,000 Btu.

3-unit Multi-split heating

AOAG20LBA3	Combination of Indoor unit				Heating Operation				COP (W/W)	
					Heating Capacity			Input Power (Min.-Max.) kW		
	Unit 1 kW	Unit 2 kW	Unit 3 kW	Total (Min.-Max.) kW						
2-unit connection	7	7	-	14	2.75	2.75	-	5.5(2.0-6.1)	1.55(0.52-1.93)	3.55
	7	9	-	16	2.80	3.30	-	6.1(2.0-7.0)	1.82(0.52-2.52)	3.35
	7	12	-	19	2.88	4.12	-	7.0(2.0-7.3)	2.31(0.52-2.66)	3.03
	7	14	-	21	2.80	4.80	-	7.6(2.0-8.3)	2.28(0.50-2.87)	3.33
	7	18	-	25	2.48	5.32	-	7.8(2.0-8.3)	2.29(0.50-2.87)	3.41
	9	9	-	18	3.30	3.30	-	6.6(2.0-7.4)	2.04(0.52-2.68)	3.24
	9	12	-	21	3.30	4.00	-	7.3(2.0-7.7)	2.43(0.52-2.87)	3.00
	9	14	-	23	3.18	4.62	-	7.8(2.0-8.3)	2.33(0.50-2.87)	3.35
	9	18	-	27	2.77	5.03	-	7.8(2.0-8.5)	2.22(0.50-2.87)	3.52
	12	12	-	24	3.80	3.80	-	7.6(2.0-7.8)	2.54(0.52-2.87)	2.99
	12	14	-	26	3.55	4.25	-	7.8(2.0-8.4)	2.32(0.50-2.87)	3.37
	3-unit connection	12	18	-	30	3.12	4.68	-	7.8(2.0-8.6)	2.21(0.50-2.87)
7		7	7	21	2.60	2.60	2.60	7.8(2.0-8.6)	2.22(0.50-2.68)	3.51
7		7	9	23	2.45	2.45	2.89	7.8(2.0-8.8)	2.15(0.50-2.87)	3.62
7		7	12	26	2.28	2.28	3.25	7.8(2.0-8.9)	2.10(0.50-2.80)	3.71
7		7	14	28	2.10	2.10	3.60	7.8(2.0-9.2)	1.98(0.50-2.72)	3.94
7		7	18	32	1.88	1.88	4.03	7.8(2.0-9.2)	1.96(0.50-2.70)	3.97
7		9	9	25	2.32	2.74	2.74	7.8(2.0-9.0)	2.10(0.50-2.87)	3.71
7		9	12	28	2.16	2.55	3.09	7.8(2.0-9.1)	2.09(0.50-2.87)	3.73
7		9	14	30	2.00	2.36	3.43	7.8(2.0-9.2)	1.95(0.50-2.72)	4.01
7		9	18	34	1.80	2.13	3.87	7.8(2.0-9.2)	1.93(0.50-2.69)	4.05
7		12	12	31	2.02	2.89	2.89	7.8(2.0-9.1)	2.04(0.50-2.87)	3.82
7		12	14	33	1.88	2.69	3.23	7.8(2.0-9.2)	1.94(0.50-2.70)	4.03
9		9	9	27	2.60	2.60	2.60	7.8(2.0-9.1)	2.05(0.50-2.87)	3.80
9		9	12	30	2.43	2.43	2.94	7.8(2.0-9.2)	2.04(0.50-2.87)	3.82
9		9	14	32	2.26	2.26	3.28	7.8(2.0-9.2)	1.93(0.50-2.70)	4.05
9		9	18	36*1	2.04	2.04	3.71	7.8(2.0-9.2)	1.91(0.50-2.68)	4.09
9		12	12	33	2.28	2.76	2.76	7.8(2.0-9.2)	1.99(0.50-2.80)	3.91
9		12	14	35	2.13	2.58	3.09	7.8(2.0-9.2)	1.93(0.50-2.69)	4.05
12		12	12	36	2.60	2.60	2.60	7.8(2.0-9.2)	1.98(0.50-2.78)	3.93

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling: Indoor temperature of 27°CDB/19°CWB and outdoor temperature of 35°CDB.
 •Pipe length: 5 m, Height difference: 0 m (Outdoor unit - Indoor unit)
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.
 *1: When ASAG1BLFCA is connected, 9,000 Btu model shall be chosen at least one "Compact wall mounted type" or more.

3-unit Multi-split heating

AOAG24LAT3	Combination of Indoor unit				Heating Operation				COP (W/W)	
					Heating Capacity			Input Power (Min.-Max.) kW		
	Unit 1 kW	Unit 2 kW	Unit 3 kW	Total (Min.-Max.) kW						
2-unit connection	7	7	-	14	2.75	2.75	-	5.5(2.0-6.1)	1.55(0.52-1.93)	3.55
	7	9	-	16	2.80	3.30	-	6.1(2.0-7.0)	1.82(0.52-2.52)	3.35
	7	12	-	19	2.88	4.12	-	7.0(2.0-7.3)	2.31(0.52-2.66)	3.03
	7	14	-	21	2.80	4.80	-	7.6(2.0-8.3)	2.28(0.50-2.87)	3.33
	7	18	-	25	2.51	5.39	-	7.9(2.0-8.3)	2.34(0.50-2.87)	3.38
	9	9	-	18	3.30	3.30	-	6.6(2.0-7.4)	2.04(0.52-2.68)	3.24
	9	12	-	21	3.30	4.00	-	7.3(2.0-7.7)	2.43(0.52-2.87)	3.00
	9	14	-	23	3.22	4.68	-	7.9(2.0-8.3)	2.38(0.50-2.87)	3.32
	9	18	-	27	2.84	5.16	-	8.0(2.0-8.5)	2.32(0.50-2.87)	3.45
	12	12	-	24	3.80	3.80	-	7.6(2.0-7.8)	2.54(0.52-2.87)	2.99
	12	14	-	26	3.59	4.31	-	7.9(2.0-8.4)	2.37(0.50-2.87)	3.33
	3-unit connection	12	18	-	30	3.20	4.80	-	8.0(2.0-8.6)	2.31(0.50-2.87)
7		7	7	21	2.47	2.47	2.47	7.4(2.0-8.6)	2.05(0.50-2.68)	3.61
7		7	9	23	2.42	2.42	2.86	7.7(2.0-8.8)	2.11(0.50-2.87)	3.65
7		7	12	26	2.28	2.28	3.25	7.8(2.0-8.9)	2.10(0.50-2.80)	3.71
7		7	14	28	2.13	2.13	3.65	7.9(2.0-9.2)	2.02(0.50-2.72)	3.91
7		7	18	32	1.91	1.91	4.09	7.9(2.0-9.2)	2.00(0.50-2.70)	3.95
7		9	9	25	2.32	2.74	2.74	7.8(2.0-9.0)	2.10(0.50-2.87)	3.71
7		9	12	28	2.16	2.55	3.09	7.8(2.0-9.1)	2.09(0.50-2.87)	3.73
7		9	14	30	2.06	2.42	3.52	8.0(2.0-9.2)	2.02(0.50-2.72)	3.96
7		9	18	34	1.85	2.18	3.97	8.0(2.0-9.2)	2.00(0.50-2.69)	4.00
7		12	12	31	2.05	2.93	2.93	7.9(2.0-9.1)	2.08(0.50-2.87)	3.80
7		12	14	33	1.93	2.76	3.31	8.0(2.0-9.2)	2.01(0.50-2.70)	3.98
9		9	9	27	2.63	2.63	2.63	7.9(2.0-9.1)	2.09(0.50-2.87)	3.78
9		9	12	30	2.46	2.46	2.98	7.9(2.0-9.2)	2.08(0.50-2.87)	3.80
9		9	14	32	2.32	2.32	3.37	8.0(2.0-9.2)	2.00(0.50-2.70)	4.00
9		9	18	36*1	2.10	2.10	3.81	8.0(2.0-9.2)	1.98(0.50-2.68)	4.04
9		12	12	33	2.34	2.83	2.83	8.0(2.0-9.2)	2.07(0.50-2.80)	3.86
9		12	14	35	2.18	2.64	3.17	8.0(2.0-9.2)	2.00(0.50-2.69)	4.00
12		12	12	36	2.67	2.67	2.67	8.0(2.0-9.2)	2.06(0.50-2.78)	3.88

Note: •7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 18: 18,000 Btu/h
 •Operating data under running indoor units are shown on the above table.
 •2 or more indoor units should be connected.
 •Cooling: Indoor temperature of 27°CDB/19°CWB and outdoor temperature of 35°CDB.
 •Pipe length: 5 m, Height difference: 0 m (Outdoor unit - Indoor unit)
 •The total ability of connected indoor units is up to 36,000 Btu from 14,000 Btu.
 *1: When ASAG1BLFCA is connected, 9,000 Btu model shall be chosen at least one "Compact wall mounted type" or more.

4-unit Multi-split Combination Table-Cooling/Heating

4-unit Multi-split cooling

AOAG30LA4	Combination of Indoor unit					Cooling Operation						EER (W/W)
						Cooling Capacity					Input Power (Min.-Max.)	
	Unit 1	Unit 2	Unit 3	Unit 4	Total	Unit 1	Unit 2	Unit 3	Unit 4	Total (Min.-Max.)		
7	7	7	-	21	2.30	2.30	2.30	-	6.9(1.8-7.5)	2.20(0.60-2.44)	3.14	
7	7	9	-	23	2.30	2.30	2.30	-	7.3(2.8-7.7)	2.35(0.90-2.55)	3.11	
7	7	12	-	26	1.99	1.99	3.02	-	7.0(2.8-8.2)	2.17(0.90-2.90)	3.23	
7	7	14	-	28	1.96	1.96	3.27	-	7.2(1.6-9.9)	2.22(0.68-3.43)	3.24	
7	7	18	-	32	1.81	1.81	4.08	-	7.7(2.8-10.0)	2.22(0.98-3.55)	3.47	
7	7	24	-	38	1.61	1.61	4.57	-	7.8(2.8-10.1)	2.19(0.98-3.53)	3.56	
7	9	9	-	25	2.09	2.45	2.45	-	7.0(2.8-8.3)	2.17(0.90-2.90)	3.23	
7	9	12	-	28	2.08	2.34	2.78	-	7.2(1.6-9.9)	2.22(0.68-3.41)	3.24	
7	9	14	-	30	1.90	2.14	3.16	-	7.2(2.8-9.1)	2.22(0.98-3.56)	3.24	
7	9	18	-	34	1.76	1.98	3.96	-	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
7	9	24	-	40	1.57	1.77	4.46	-	7.8(2.8-10.1)	2.19(0.98-3.53)	3.56	
7	12	12	-	31	1.96	2.62	2.62	-	7.2(1.6-9.1)	2.22(0.68-3.54)	3.24	
7	12	14	-	33	1.83	2.43	3.04	-	7.3(2.8-9.2)	2.22(0.98-3.56)	3.29	
7	12	18	-	37	1.68	2.24	3.78	-	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
7	12	24	-	43	1.51	2.01	4.28	-	7.8(2.8-10.1)	2.19(0.98-3.56)	3.56	
7	14	14	-	35	1.68	2.81	2.81	-	7.3(2.8-9.3)	2.22(0.98-3.58)	3.29	
7	14	18	-	39	1.57	2.61	3.52	-	7.7(1.5-10.0)	2.22(1.73-3.58)	3.47	
7	14	24	-	45	1.44	2.39	4.07	-	7.8(3.5-10.1)	2.20(1.73-3.58)	3.59	
7	18	18	-	43	1.42	3.19	3.19	-	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
7	18	24	-	49	1.30	2.92	3.68	-	7.9(4.7-10.1)	2.22(1.73-3.58)	3.56	
9	9	9	-	27	2.40	2.40	2.40	-	7.2(2.8-8.9)	2.22(0.98-3.42)	3.24	
9	9	12	-	30	2.26	2.26	2.68	-	7.2(2.8-9.1)	2.22(0.98-3.54)	3.24	
9	9	14	-	32	2.10	2.10	3.11	-	7.3(2.8-9.2)	2.22(0.98-3.57)	3.29	
9	9	18	-	36	1.93	1.93	3.85	-	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
9	9	24	-	42	1.73	1.73	4.35	-	7.8(2.8-10.1)	2.20(1.73-3.54)	3.55	
9	12	12	-	33	2.14	2.53	2.53	-	7.2(2.8-9.1)	2.22(0.98-3.54)	3.24	
9	12	14	-	35	1.99	2.36	2.95	-	7.3(2.8-9.2)	2.22(0.98-3.57)	3.29	
9	12	18	-	39	1.84	2.18	3.68	-	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
9	12	24	-	45	1.66	1.97	4.18	-	7.8(2.8-10.1)	2.19(0.98-3.56)	3.56	
9	14	14	-	37	1.84	2.73	2.73	-	7.3(1.5-9.3)	2.22(1.73-3.58)	3.29	
9	14	18	-	41	1.74	2.58	3.48	-	7.8(3.5-10.0)	2.22(1.73-3.58)	3.51	
9	14	24	-	47	1.64	2.34	3.88	-	7.8(3.5-10.0)	2.22(1.73-3.56)	3.56	
9	18	18	-	45	1.56	3.12	3.12	-	7.8(4.7-10.1)	2.22(1.73-3.58)	3.51	
12	12	12	-	36	2.43	2.43	2.43	-	7.3(2.8-9.2)	2.22(0.98-3.55)	3.29	
12	12	14	-	38	2.28	2.28	2.85	-	7.4(2.8-9.3)	2.22(0.98-3.58)	3.33	
12	12	18	-	42	2.12	2.12	3.57	-	7.8(3.5-10.0)	2.20(1.73-3.57)	3.51	
12	12	24	-	48	1.92	1.92	4.07	-	7.8(3.5-10.1)	2.20(1.73-3.54)	3.59	
12	14	14	-	40	2.11	2.64	2.64	-	7.4(1.5-9.4)	2.22(1.73-3.58)	3.33	
12	14	18	-	44	1.98	2.48	3.34	-	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
12	18	18	-	48	1.81	3.05	3.05	-	7.9(4.7-10.1)	2.22(1.73-3.58)	3.56	
7	7	7	7	28	1.90	1.90	1.90	1.90	7.6(1.6-9.8)	2.20(0.68-3.41)	3.45	
7	7	7	9	30	1.84	1.84	1.84	2.07	7.6(1.6-9.8)	2.22(0.68-3.54)	3.42	
7	7	7	12	33	1.78	1.78	2.37	2.37	7.7(1.6-9.9)	2.22(0.68-3.54)	3.47	
7	7	7	14	35	1.65	1.65	2.75	2.75	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
7	7	7	18	39	1.52	1.52	3.43	3.43	8.0(2.8-10.1)	2.20(0.98-3.55)	3.64	
7	7	9	9	32	1.81	2.04	2.04	2.04	7.7(2.8-9.9)	2.22(0.98-3.42)	3.47	
7	7	9	12	35	1.73	1.73	1.94	2.30	7.7(2.8-9.9)	2.22(0.98-3.55)	3.47	
7	7	9	14	37	1.61	1.61	2.68	2.68	7.7(2.8-10.0)	2.22(0.98-3.57)	3.47	
7	7	9	18	41	1.49	1.49	1.67	3.35	8.0(3.5-10.1)	2.20(1.73-3.55)	3.64	
7	7	12	12	38	1.65	1.65	2.20	2.20	7.7(2.8-10.0)	2.22(0.98-3.55)	3.47	
7	7	12	14	40	1.56	1.56	2.08	2.08	7.8(2.8-10.0)	2.22(0.98-3.57)	3.51	
7	7	12	18	44	1.43	1.43	1.91	3.22	8.0(3.5-10.1)	2.20(1.73-3.56)	3.64	
7	7	14	14	42	1.50	1.50	2.50	2.50	8.0(3.5-10.1)	2.22(1.73-3.58)	3.60	
7	7	14	18	46	1.35	1.35	2.25	3.04	8.0(3.5-10.1)	2.22(1.73-3.58)	3.60	
7	9	9	9	34	1.76	1.76	1.98	1.98	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
7	9	9	12	37	1.68	1.68	1.89	2.24	7.7(2.8-9.9)	2.22(0.98-3.56)	3.47	
7	9	9	14	39	1.59	1.59	1.78	2.64	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
7	9	9	18	43	1.45	1.45	1.64	3.27	8.0(3.5-10.1)	2.22(1.73-3.56)	3.60	
7	9	12	12	40	1.63	1.63	2.17	2.17	7.8(2.8-10.0)	2.22(0.98-3.56)	3.51	
7	9	12	14	42	1.52	1.52	2.03	2.54	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
7	9	12	18	46	1.40	1.40	1.87	3.15	8.0(3.5-10.1)	2.22(1.73-3.56)	3.60	
7	9	14	14	44	1.45	1.63	2.41	2.41	7.9(3.5-10.1)	2.22(1.73-3.58)	3.56	
7	9	14	18	48	1.32	1.49	2.21	2.98	8.0(4.7-10.1)	2.22(1.73-3.57)	3.60	
7	12	12	12	43	1.56	1.56	2.08	2.08	7.8(2.8-10.0)	2.22(0.98-3.56)	3.51	
7	12	12	14	45	1.48	1.48	1.98	2.47	7.9(3.5-10.1)	2.22(1.73-3.58)	3.56	
7	12	12	18	49	1.35	1.40	1.80	3.04	8.0(3.5-10.1)	2.22(1.73-3.56)	3.60	
7	12	14	14	47	1.39	1.86	2.32	2.32	7.9(3.5-10.1)	2.22(1.73-3.58)	3.56	
9	9	9	9	36	1.93	1.93	1.93	1.93	7.7(2.8-9.9)	2.22(1.73-3.56)	3.47	
9	9	9	12	39	1.86	1.86	1.86	2.21	7.8(3.5-10.0)	2.22(1.73-3.57)	3.51	
9	9	9	14	41	1.74	1.74	1.74	2.58	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
9	9	9	18	45*	1.60	1.60	1.60	3.20	8.0(4.7-10.1)	2.22(1.73-3.58)	3.60	
9	9	12	12	42	1.78	2.12	2.12	2.12	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
9	9	12	14	44	1.67	1.67	1.67	2.48	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
9	9	12	18	48*	1.54	1.54	1.54	3.09	8.0(4.7-10.1)	2.22(1.73-3.58)	3.60	
9	9	14	14	46	1.59	1.59	2.36	2.36	7.9(4.7-10.1)	2.22(1.73-3.58)	3.56	
9	12	12	12	45	1.71	2.03	2.03	2.03	7.8(3.5-10.1)	2.22(1.73-3.58)	3.51	
9	12	12	14	47	1.63	1.93	1.93	2.41	7.9(3.5-10.1)	2.22(1.73-3.58)	3.56	
9	12	14	14	49	1.53	1.82	2.27	2.27	7.9(4.7-10.1)	2.22(1.73-3.58)	3.56	
12	12	12	12	48	2.00	2.00	2.00	2.00	8.0(3.5-10.1)	2.22(1.73-3.58)	3.60	

Note: *7: 7,000 Btu/h, 9: 9,000 Btu/h, 12: 12,000 Btu/h, 14: 14,000 Btu/h, 18: 18,000 Btu/h, 24: 24,000 Btu/h
 • Operating data under running indoor units are shown on the above table.
 • 3 or more indoor units should be connected.
 • Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).
 • Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to indoor unit)
 • The total ability of connected indoor unit is up to 49000 Btu from 27000 Btu.
 *1: Connection of ASAG1BL + ARAG09L + ARAG09L is not available. All types other than this combination can be connected.
 *2: Connection of ASAG1BL + ARAG12L + ARAG09L + ARAG09L is not available. All types other than this combination can be connected.

4-unit Multi-split heating

AOAG30LA4	Combination of Indoor unit					Heating Operation						COP (W/W)
						Heating Capacity					Input Power (Min.-Max.)	
	Unit 1	Unit 2	Unit 3	Unit 4	Total	Unit 1	Unit 2	Unit 3	Unit 4	Total (Min.-Max.)		
7	7	7	-	21	2.70	2.70	2.70	-	8.1(1.8-8.8)	2.30(0.55-2.65)	3.52	
7	7	9	-	23	2.70	2.70	3.30	-	8.7(3.9-9.3)	2.60(0.90-2.85)	3.35	
7	7	12	-	26	2.70	2.70	3.80	-	9.2(3.9-9.7)	2.83(0.90-3.10)	3.25	
7	7	14	-	28	2.42	2.42	4.15	-	9.0(1.8-10.1)	2.65(0.58-3.53)	3.38	
7	7	18	-	32	2.27	2.27	4.86	-	9.4(3.3-11.2)	2.65(0.73-3.52)	3.82	
7	7	24	-	38	2.03	2.03	5.44	-	9.5(3.3-11.5)	2.47(0.87-3.52)	3.85	
7	9	9	-	25	2.70	3.30	3.30	-	9.3(3.9-9.7)	2.80(0.90-3.10)	3.32	
7	9	12	-	28	2.49	2.94	3.56	-	9.0(1.8-10.0)	2.69(0.58-3.51)	3.35	
7	9	14	-	30	2.33	2.75	4.00	-	9.1(3.3-10.2)	2.64(0.87-3.50)	3.45	
7	9	18	-	34	2.17	2.56	4.66	-	9.4(3.3-11.3)	2.45(0.87-3.50)	3.84	
7	9	24	-	40	1.98	2.33	5.29	-	9.6(3.3-11.5)	2.46(0.87-3.51)	3.90	
7	12	12	-	31	2.33	3.33	3.33	-	9.0(1.8-10.1)	2.66(0.58-3.48)	3.38	
7	12	14	-	33	2.22	3.17	3.80	-	9.2(3.3-10.3)	2.67(0.87-3.48)	3.51	
7	12	18	-	37	2.08	2.97	4.45	-	9.5(3.3-11.4)	2.44(0.87-3.47)	3.89	
7	12	24	-	43	1.88	2.69	5.03	-	9.6(3.3-11.7)	2.45(0.87-3.56)	3.92	
7	14	14	-	35	2.10	3.60	3.60	-	9.3(3.3-10.6)	2.59(0.87-3.48)	3.59	
7	14	18	-	39	1.96	3.35	4.19	-	9.5(3.7-11.5)	2.42(0.73-3.52)	3.93	
7	14	24	-	45	1.78	3.05	4.77	-	9.6(3.3-11.7)	2.45(0.87-3.56)	3.92	
7	18	18	-	43	1.82	3.89	3.89	-	9.6(3.7-12.0)	2.40(0.97-3.52)	4.00	
7	18	24	-	49	1.65	3.53	4.42	-	9.6(4.3-12			

5-unit Multi-split Combination Table-Cooling

5-unit Multi-split cooling

AOYG36L8LAS	Combination of Indoor unit					Cooling Operation							EER (W/W)
						Cooling Capacity					Input Power (Min.-Max.)		
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Total (Min.-Max.)	Input Power (Min.-Max.)	
Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	kW	kW	kW	kW	kW	kW	kW	kW	
2-unit connection	7	24	-	-	-	2.00	7.00	-	-	-	9.0 (3.5-11.1)	2.31 (0.8-3.29)	3.89
2-unit connection	9	24	-	-	-	2.50	7.00	-	-	-	9.5 (3.5-11.8)	2.53 (0.8-3.59)	3.75
2-unit connection	12	24	-	-	-	3.33	6.67	-	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	14	24	-	-	-	3.68	6.32	-	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	18	18	-	-	-	5.00	5.00	-	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	18	24	-	-	-	4.29	5.71	-	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.58
2-unit connection	24	24	-	-	-	5.00	5.00	-	-	-	10.0 (3.5-12.5)	2.78 (0.8-3.88)	3.60
2-unit connection	7	7	14	-	-	2.00	2.00	4.00	-	-	8.0 (3.5-10.0)	1.90 (0.8-2.85)	4.21
2-unit connection	7	7	18	-	-	2.00	2.00	5.00	-	-	9.0 (3.5-11.4)	2.32 (0.8-3.44)	3.88
2-unit connection	7	7	24	-	-	1.84	1.84	6.32	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	7	9	12	-	-	2.00	2.50	3.50	-	-	8.0 (3.5-10.0)	1.90 (0.8-2.85)	4.21
2-unit connection	7	9	14	-	-	2.00	2.50	4.00	-	-	8.5 (3.5-10.7)	2.10 (0.8-3.15)	4.05
2-unit connection	7	9	18	-	-	2.00	2.50	5.00	-	-	9.5 (3.5-12.1)	2.55 (0.8-3.74)	3.72
2-unit connection	7	9	24	-	-	1.75	2.25	6.00	-	-	10.0 (3.5-12.5)	2.80 (0.8-3.88)	3.57
2-unit connection	7	12	12	-	-	2.00	3.50	3.50	-	-	9.0 (3.5-11.1)	2.27 (0.8-3.29)	3.97
2-unit connection	7	12	14	-	-	2.00	3.50	4.00	-	-	9.5 (3.5-11.8)	2.50 (0.8-3.59)	3.80
2-unit connection	7	12	18	-	-	1.89	3.24	4.87	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	7	12	24	-	-	1.63	2.79	5.58	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.59
2-unit connection	7	14	14	-	-	2.00	4.00	4.00	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	7	14	18	-	-	1.79	3.59	4.62	-	-	10.0 (3.5-12.5)	2.80 (0.8-3.88)	3.57
2-unit connection	7	14	24	-	-	1.56	3.11	5.33	-	-	10.0 (3.5-12.5)	2.78 (0.8-3.88)	3.60
2-unit connection	7	18	18	-	-	1.82	4.19	4.19	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.59
2-unit connection	7	18	24	-	-	1.63	3.67	4.90	-	-	10.0 (3.5-12.5)	2.77 (0.8-3.88)	3.61
2-unit connection	9	9	9	-	-	2.50	2.50	2.50	-	-	7.5 (3.5-9.6)	1.74 (0.8-2.70)	4.30
2-unit connection	9	9	12	-	-	2.50	2.50	3.50	-	-	8.5 (3.5-10.7)	2.10 (0.8-3.15)	4.05
2-unit connection	9	9	14	-	-	2.50	2.50	4.00	-	-	9.0 (3.5-11.4)	2.32 (0.8-3.44)	3.88
2-unit connection	9	9	18	-	-	2.50	2.50	5.00	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
2-unit connection	9	9	24	-	-	2.14	2.14	5.72	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.58
3-unit connection	9	12	12	-	-	2.50	3.50	3.50	-	-	9.5 (3.5-11.8)	2.50 (0.8-3.59)	3.80
3-unit connection	9	12	14	-	-	2.50	3.50	4.00	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
3-unit connection	9	12	18	-	-	2.31	3.08	4.61	-	-	10.0 (3.5-12.5)	2.80 (0.8-3.88)	3.57
3-unit connection	9	12	24	-	-	2.00	3.67	5.33	-	-	10.0 (3.5-12.5)	2.78 (0.8-3.88)	3.60
3-unit connection	9	14	14	-	-	2.44	3.78	3.78	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
3-unit connection	9	14	18	-	-	2.20	3.41	4.39	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.58
3-unit connection	9	14	24	-	-	1.91	2.98	5.11	-	-	10.0 (3.5-12.5)	2.78 (0.8-3.88)	3.60
3-unit connection	9	18	18	-	-	2.00	4.00	4.00	-	-	10.0 (3.5-12.5)	2.78 (0.8-3.88)	3.60
3-unit connection	9	18	24	-	-	1.76	3.53	4.71	-	-	10.0 (3.5-12.5)	2.76 (0.8-3.88)	3.62
3-unit connection	12	12	12	-	-	3.33	3.33	3.33	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
3-unit connection	12	12	14	-	-	3.16	3.16	3.68	-	-	10.0 (3.5-12.5)	2.81 (0.8-3.88)	3.56
3-unit connection	12	12	18	-	-	2.86	2.86	4.28	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.58
3-unit connection	12	12	24	-	-	2.50	2.50	5.00	-	-	10.0 (3.5-12.5)	2.77 (0.8-3.88)	3.61
3-unit connection	12	14	14	-	-	3.00	3.50	3.50	-	-	10.0 (3.5-12.5)	2.80 (0.8-3.88)	3.57
3-unit connection	12	14	18	-	-	2.73	3.18	4.09	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.59
3-unit connection	12	14	24	-	-	2.40	2.80	4.80	-	-	10.0 (3.5-12.5)	2.76 (0.8-3.88)	3.62
3-unit connection	12	18	18	-	-	2.50	3.75	3.75	-	-	10.0 (3.5-12.5)	2.77 (0.8-3.88)	3.61
3-unit connection	12	18	24	-	-	2.22	3.33	4.45	-	-	10.0 (3.5-12.5)	2.75 (0.8-3.88)	3.64
3-unit connection	14	14	14	-	-	3.33	3.33	3.33	-	-	10.0 (3.5-12.5)	2.79 (0.8-3.88)	3.58
3-unit connection	14	14	18	-	-	3.04	3.04	3.92	-	-	10.0 (3.5-12.5)	2.78 (0.8-3.88)	3.60
3-unit connection	14	14	24	-	-	2.69	2.69	4.62	-	-	10.0 (3.5-12.5)	2.75 (0.8-3.88)	3.63
3-unit connection	14	18	18	-	-	2.60	3.60	3.60	-	-	10.0 (3.5-12.5)	2.76 (0.8-3.88)	3.62
3-unit connection	18	18	18	-	-	3.33	3.33	3.33	-	-	10.0 (3.5-12.5)	2.75 (0.8-3.88)	3.64
3-unit connection	7	7	7	7	7	2.00	2.00	2.00	2.00	-	8.0 (3.5-10.0)	1.84 (0.8-2.85)	4.34
3-unit connection	7	7	7	9	9	2.00	2.00	2.00	2.50	-	8.5 (3.5-10.7)	2.00 (0.8-3.15)	4.25
3-unit connection	7	7	7	12	12	2.00	2.00	2.00	3.50	-	9.5 (3.5-11.8)	2.32 (0.8-3.59)	4.10
3-unit connection	7	7	7	18	18	1.79	1.79	4.63	-	-	10.0 (3.5-12.5)	2.49 (0.8-3.88)	4.01
3-unit connection	7	7	7	24	24	1.56	1.56	5.32	-	-	10.0 (3.5-12.5)	2.47 (0.8-3.88)	4.05
3-unit connection	7	7	9	9	9	2.00	2.00	2.50	2.50	-	9.0 (3.5-11.4)	2.17 (0.8-3.44)	4.15
3-unit connection	7	7	9	12	12	2.00	2.00	2.50	3.50	-	10.0 (3.5-12.5)	2.50 (0.8-3.88)	4.00
3-unit connection	7	7	9	14	14	1.89	1.89	2.43	3.79	-	10.0 (3.5-12.5)	2.50 (0.8-3.88)	4.00
3-unit connection	7	7	9	18	18	1.71	1.71	2.20	4.88	-	10.0 (3.5-12.5)	2.49 (0.8-3.88)	4.02
3-unit connection	7	7	9	24	24	1.49	1.49	1.91	5.11	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.06
3-unit connection	7	7	12	12	12	1.84	1.84	3.16	3.16	-	10.0 (3.5-12.5)	2.49 (0.8-3.88)	4.02
3-unit connection	7	7	12	14	14	1.75	1.75	2.10	3.50	-	10.0 (3.5-12.5)	2.49 (0.8-3.88)	4.02
3-unit connection	7	7	12	18	18	1.59	1.59	2.73	4.09	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.04
3-unit connection	7	7	12	24	24	1.40	1.40	2.40	4.80	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.07
3-unit connection	7	7	14	14	14	1.67	1.67	3.33	3.33	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.03
3-unit connection	7	7	14	18	18	1.52	1.52	3.04	3.92	-	10.0 (3.5-12.5)	2.47 (0.8-3.88)	4.05
3-unit connection	7	7	14	24	24	1.35	1.35	2.69	4.61	-	10.0 (3.5-12.5)	2.45 (0.8-3.88)	4.08
3-unit connection	7	7	18	18	18	1.40	1.40	3.60	3.60	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.07
3-unit connection	7	9	9	9	9	2.00	2.50	2.50	2.50	-	9.5 (3.5-12.1)	2.35 (0.8-3.74)	4.05
3-unit connection	7	9	9	12	12	1.89	2.43	2.43	3.25	-	10.0 (3.5-12.5)	2.50 (0.8-3.88)	4.00
3-unit connection	7	9	9	14	14	1.71	2.17	2.17	3.59	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.01
3-unit connection	7	9	9	18	18	1.53	2.09	2.09	4.19	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.03
3-unit connection	7	9	9	24	24	1.43	1.84	1.84	4.89	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.07
3-unit connection	7	9	12	12	12	1.75	2.25	3.00	3.00	-	10.0 (3.5-12.5)	2.49 (0.8-3.88)	4.02
3-unit connection	7	9	12	14	14	1.67	2.14	2.86	3.33	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.03
3-unit connection	7	9	12	18	18	1.52	1.96	2.61	3.91	-	10.0 (3.5-12.5)	2.47 (0.8-3.88)	4.05
3-unit connection	7	9	12	24	24	1.35	1.73	2.31	4.61	-	10.0 (3.5-12.5)	2.45 (0.8-3.88)	4.08
3-unit connection	7	9	14	14	14	1.59	2.05	3.18	3.18	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.04
3-unit connection	7	9	14	18	18	1.46	1.88	2.92	3.74	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.06
3-unit connection	7	9	14	24	24	1.30	1.67	2.59	4.44	-	10.0 (3.5-12.5)	2.44 (0.8-3.88)	4.10
3-unit connection	7	9	18	18	18	1.35	1.75	3.45	3.45	-	10.0 (3.5-12.5)	2.45 (0.8-3.88)	4.08
3-unit connection	7	12	12	12	12	1.63	2.79	2.79	2.79	-	10.0 (3.5-12.5)	2.48 (0.8-3.88)	4.03
3-unit connection	7	12	12	14	14	1.56	2.67	2.67	3.10	-	10.0 (3.5-12.5)	2.47 (0.8-3.88)	4.05
3-unit connection	7	12	12	18	18	1.43	2.45	2.45	3.67	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.07
3-unit connection	7	12	14	14	14	1.48	2.46	2.98	2.98	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.06
3-unit connection	7	12	14	18	18	1.37	2.35	2.75	3.53	-	10.0 (3.5-12.5)	2.45 (0.8-3.88)	4.08
3-unit connection	7	14	14	14	14	1.42	2.86	2.86	2.86	-	10.0 (3.5-12.5)	2.46 (0.8-3.88)	4.07
3-unit connection	7	14	14	18	18	1.32	2.64	2.64	3.40	-	10.0 (3.5-12.5)	2.44 (0.8-3.88)	4.09

AOYG36L8LAS	Combination of Indoor unit					Cooling Operation							EER (W/W)
						Cooling Capacity					Input Power (Min.-Max.)		
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Total (Min.-Max.)	Input Power (Min.-Max.)	
Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	kW	kW	kW	kW	kW	kW	kW	kW	
4-unit connection	9	9	9	9	9	2.50	2.50	2.50	2.50	-	10.0 (3.5-12.5)	2.50 (0.8-3.88)	4.00
4-unit connection	9	9	9	12	12								

5-unit Multi-split Combination Table-Heating

5-unit Multi-split heating

AOYG36L8LAS	Combination of indoor unit					Heating Operation						COP (NHW)	
						Heating Capacity					Input Power (Min.-Max.)		COP (NHW)
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5			
2-unit connection	7	24	-	-	-	2.40	8.40	-	-	-	10.8 (3.5-12.4)	2.97 (0.73-2.84)	3.64
	9	24	-	-	-	3.00	8.40	-	-	-	11.4 (3.5-13.2)	3.15 (0.73-3.58)	3.62
	12	24	-	-	-	4.00	8.00	-	-	-	12.0 (3.5-14.0)	3.34 (0.73-3.82)	3.59
	14	24	-	-	-	4.42	7.58	-	-	-	12.0 (3.5-14.0)	3.33 (0.73-3.82)	3.60
	18	18	-	-	-	6.00	6.00	-	-	-	12.0 (3.5-14.0)	3.34 (0.73-3.82)	3.59
	18	24	-	-	-	5.14	6.86	-	-	-	12.0 (3.5-14.0)	3.32 (0.73-3.82)	3.61
	24	24	-	-	-	6.00	6.00	-	-	-	12.0 (3.5-14.0)	3.31 (0.73-3.82)	3.62
	7	7	14	-	-	2.40	2.40	4.80	-	-	9.6 (3.5-11.2)	2.45 (0.72-2.98)	3.92
	7	7	18	-	-	2.40	2.40	6.00	-	-	10.8 (3.5-12.8)	2.80 (0.73-3.46)	3.86
	7	7	24	-	-	2.21	2.21	7.58	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82
	7	9	12	-	-	2.40	3.00	4.20	-	-	9.6 (3.5-11.2)	2.45 (0.72-2.98)	3.92
	7	9	14	-	-	2.40	3.00	4.80	-	-	10.2 (3.5-12.0)	2.63 (0.73-3.22)	3.88
7	9	18	-	-	2.40	3.00	6.00	-	-	11.4 (3.5-13.6)	2.97 (0.73-3.70)	3.84	
7	9	24	-	-	2.10	2.70	7.20	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
7	12	12	-	-	2.40	4.20	4.20	-	-	10.8 (3.5-12.4)	2.79 (0.73-3.44)	3.87	
7	12	14	-	-	2.40	4.20	4.80	-	-	11.4 (3.5-13.2)	2.96 (0.73-3.58)	3.85	
7	12	18	-	-	2.27	3.89	5.84	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
7	12	24	-	-	1.95	3.35	6.70	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
7	14	14	-	-	2.40	4.80	4.80	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
7	14	18	-	-	2.15	4.31	5.54	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
7	14	24	-	-	1.87	3.73	6.40	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
7	18	18	-	-	1.96	5.02	5.02	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
7	18	24	-	-	1.71	4.88	6.40	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
9	9	9	-	-	3.00	3.00	3.00	-	-	9.0 (3.5-10.8)	2.29 (0.72-2.86)	3.93	
9	9	12	-	-	3.00	3.00	4.20	-	-	10.2 (3.5-12.0)	2.63 (0.73-3.22)	3.88	
9	9	14	-	-	3.00	3.00	4.80	-	-	10.8 (3.5-12.8)	2.80 (0.73-3.46)	3.86	
9	9	18	-	-	3.00	3.00	6.00	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
9	9	24	-	-	2.57	2.57	8.86	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
9	12	12	-	-	3.00	4.20	4.20	-	-	11.4 (3.5-13.2)	2.96 (0.73-3.58)	3.85	
9	12	14	-	-	3.00	4.20	4.80	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
9	12	18	-	-	2.77	3.69	5.54	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
9	12	24	-	-	2.40	3.20	6.40	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
9	14	14	-	-	2.92	4.54	4.54	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
9	14	18	-	-	2.63	4.10	5.27	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
9	14	24	-	-	2.30	3.57	6.13	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
9	18	18	-	-	2.40	4.80	4.80	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
9	18	24	-	-	2.12	4.20	5.64	-	-	12.0 (3.5-14.0)	3.12 (0.73-3.82)	3.85	
12	12	12	-	-	4.00	4.00	4.00	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
12	12	14	-	-	3.79	3.79	4.42	-	-	12.0 (3.5-14.0)	3.14 (0.73-3.82)	3.82	
12	12	18	-	-	3.43	3.43	5.14	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
12	12	24	-	-	3.00	3.00	6.00	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
12	14	14	-	-	3.60	4.20	4.20	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
12	14	18	-	-	3.27	3.82	4.91	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
12	14	24	-	-	2.88	3.36	5.76	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
12	18	18	-	-	3.00	4.50	4.50	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
12	18	24	-	-	2.67	4.00	6.00	-	-	12.0 (3.5-14.0)	3.12 (0.73-3.82)	3.85	
14	14	14	-	-	4.00	4.00	4.00	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.83	
14	14	18	-	-	3.65	3.65	4.70	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
14	14	24	-	-	3.23	3.23	5.54	-	-	12.0 (3.5-14.0)	3.12 (0.73-3.82)	3.85	
14	18	18	-	-	3.33	3.33	4.32	-	-	12.0 (3.5-14.0)	3.13 (0.73-3.82)	3.84	
18	18	18	-	-	4.00	4.00	4.00	-	-	12.0 (3.5-14.0)	3.12 (0.73-3.82)	3.85	
7	7	7	7	-	2.40	2.40	2.40	2.40	-	9.6 (3.5-11.2)	2.31 (0.72-2.98)	4.16	
7	7	7	9	-	2.40	2.40	2.40	3.00	-	10.2 (3.5-12.0)	2.47 (0.73-3.22)	4.13	
7	7	7	12	-	2.40	2.40	2.40	4.20	-	11.4 (3.5-13.2)	2.79 (0.73-3.58)	4.09	
7	7	7	14	-	2.40	2.40	2.40	4.80	-	12.0 (3.5-14.0)	2.95 (0.73-3.82)	4.07	
7	7	7	18	-	2.15	2.15	2.15	5.55	-	12.0 (3.5-14.0)	2.94 (0.73-3.82)	4.08	
7	7	7	24	-	1.87	1.87	1.87	6.39	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10	
7	7	7	9	9	-	2.40	2.40	3.00	3.00	-	10.8 (3.5-12.8)	2.64 (0.73-3.46)	4.09
7	7	7	9	12	-	2.40	2.40	3.00	4.20	-	12.0 (3.5-14.0)	2.95 (0.73-3.82)	4.07
7	7	7	9	14	-	2.27	2.27	2.92	4.54	-	12.0 (3.5-14.0)	2.95 (0.73-3.82)	4.07
7	7	7	9	18	-	2.05	2.05	2.63	5.27	-	12.0 (3.5-14.0)	2.94 (0.73-3.82)	4.08
7	7	7	9	24	-	1.79	1.79	2.30	6.12	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10
7	7	7	12	12	-	2.21	2.21	3.79	3.79	-	12.0 (3.5-14.0)	2.94 (0.73-3.82)	4.08
7	7	7	12	14	-	2.10	2.10	3.60	4.20	-	12.0 (3.5-14.0)	2.94 (0.73-3.82)	4.08
7	7	7	12	18	-	1.91	1.91	3.27	4.91	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.09
7	7	7	12	24	-	1.68	1.68	2.88	5.76	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11
7	7	7	14	14	-	2.00	2.00	4.00	4.00	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.09
7	7	7	14	18	-	1.83	1.83	3.65	4.69	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10
7	7	7	14	24	-	1.62	1.62	3.23	5.53	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11
7	7	7	18	18	-	1.68	1.68	4.32	4.32	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11
7	9	9	9	9	-	2.40	3.00	3.00	3.00	-	11.4 (3.5-13.6)	2.80 (0.73-3.70)	4.07
7	9	9	9	12	-	2.27	2.92	2.92	3.89	-	12.0 (3.5-14.0)	2.95 (0.73-3.82)	4.07
7	9	9	9	14	-	2.15	2.77	2.77	4.31	-	12.0 (3.5-14.0)	2.94 (0.73-3.82)	4.08
7	9	9	9	18	-	1.95	2.51	2.51	5.03	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.09
7	9	9	9	24	-	1.71	2.20	2.20	5.89	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11
7	9	12	12	-	2.10	2.70	3.60	3.60	-	12.0 (3.5-14.0)	2.94 (0.73-3.82)	4.08	
7	9	12	14	-	2.00	2.57	3.43	4.00	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.09	
7	9	12	18	-	1.83	2.35	3.13	4.69	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10	
7	9	12	24	-	1.62	2.08	2.77	5.53	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11	
7	9	14	14	-	1.91	2.45	3.82	3.82	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.09	
7	9	14	18	-	1.75	2.25	3.50	4.50	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10	
7	9	14	24	-	1.56	2.00	3.11	5.33	-	12.0 (3.5-14.0)	2.91 (0.73-3.82)	4.12	
7	9	18	18	-	1.62	2.08	3.13	4.15	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11	
7	12	12	12	-	1.95	3.35	3.35	3.35	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.09	
7	12	12	14	-	1.80	3.20	3.73	3.73	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10	
7	12	12	18	-	1.71	2.94	2.94	4.41	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11	
7	12	14	14	-	1.80	3.06	3.57	3.57	-	12.0 (3.5-14.0)	2.93 (0.73-3.82)	4.10	
7	12	14	18	-	1.65	2.82	3.29	4.24	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11	
7	14	14	14	-	1.71	3.43	3.43	3.43	-	12.0 (3.5-14.0)	2.92 (0.73-3.82)	4.11	
7	14	14	18	-	1.58	3.17	3.17	4.08	-	12.0 (3.5-14.0)	2.91 (0.73-3.82)	4.12	

AOYG36L8LAS	Combination of indoor unit					Heating Operation						COP (NHW)
						Heating Capacity					Input Power (Min.-Max.)	
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5		
4-unit connection	9											

6-unit Multi-split Combination Table-Cooling

6-unit Multi-split cooling

AOYGASLBLAG	Combination of indoor unit						Cooling Operation							EER (W/W)	
							Cooling Capacity								Input Power (Min.-Max.)
	Unit1	Unit2	Unit3	Unit4	Unit5	Unit6	Unit1	Unit2	Unit3	Unit4	Unit5	Unit6	Total (Min.-Max.)		
2-unit connection	12	24	-	-	-	-	3.50	7.00	-	-	-	-	10.5 (3.5-11.5)	3.06 (0.8-3.32)	3.43
	14	24	-	-	-	-	4.00	7.00	-	-	-	-	11.0 (3.5-12.1)	3.28 (0.8-3.70)	3.35
	18	18	-	-	-	-	5.00	5.00	-	-	-	-	10.0 (3.5-11.5)	2.92 (0.8-3.32)	3.42
	18	24	-	-	-	-	5.00	7.00	-	-	-	-	12.0 (3.5-13.4)	3.75 (0.8-4.46)	3.20
	24	24	-	-	-	-	6.25	6.25	-	-	-	-	12.5 (3.5-14.0)	4.01 (0.8-4.84)	3.12
	7	7	24	-	-	-	2.00	2.00	7.00	-	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45
	7	9	18	-	-	-	2.00	2.50	5.00	-	-	-	9.5 (3.5-10.8)	2.55 (0.8-2.93)	3.73
	7	9	24	-	-	-	2.00	2.50	7.00	-	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37
	7	12	18	-	-	-	2.00	3.50	5.00	-	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48
	7	12	24	-	-	-	2.00	3.50	6.90	-	-	-	12.4 (3.5-13.7)	3.82 (0.8-4.65)	3.25
	7	14	14	-	-	-	2.00	4.00	4.00	-	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56
	7	14	18	-	-	-	2.00	4.00	5.00	-	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41
7	14	24	-	-	-	1.94	3.89	6.67	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
7	18	18	-	-	-	2.00	5.00	5.00	-	-	-	12.0 (3.5-13.7)	3.69 (0.8-4.65)	3.25	
7	18	24	-	-	-	1.79	4.59	6.12	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23	
7	24	24	-	-	-	1.60	5.45	5.45	-	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26	
9	9	18	-	-	-	2.50	2.50	5.00	-	-	-	10.0 (3.5-11.5)	2.84 (0.8-3.32)	3.52	
9	9	24	-	-	-	2.50	2.50	7.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
9	12	14	-	-	-	2.50	3.50	4.00	-	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56	
9	12	18	-	-	-	2.50	3.50	5.00	-	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41	
9	12	24	-	-	-	2.50	3.33	6.67	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
9	14	14	-	-	-	2.50	4.00	4.00	-	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48	
9	14	18	-	-	-	2.50	4.00	5.00	-	-	-	11.5 (3.5-12.7)	3.45 (0.8-4.27)	3.33	
9	14	24	-	-	-	2.40	3.72	6.38	-	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22	
9	18	18	-	-	-	2.50	5.00	5.00	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
9	18	24	-	-	-	2.21	4.41	5.88	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
9	24	24	-	-	-	1.98	5.26	5.26	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
12	12	12	-	-	-	3.50	3.50	3.50	-	-	-	10.5 (3.5-11.5)	2.98 (0.8-3.32)	3.52	
12	12	14	-	-	-	3.50	3.50	4.00	-	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45	
12	12	18	-	-	-	3.50	3.50	5.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
12	12	24	-	-	-	3.13	3.13	6.24	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23	
12	14	14	-	-	-	4.00	4.00	4.00	-	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37	
12	14	18	-	-	-	3.50	4.00	5.00	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
12	14	24	-	-	-	3.00	3.50	6.00	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
12	18	18	-	-	-	3.12	4.69	4.69	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23	
12	18	24	-	-	-	2.78	4.17	5.55	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
12	24	24	-	-	-	2.50	5.00	5.00	-	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28	
14	14	14	-	-	-	4.00	4.00	4.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
14	14	18	-	-	-	3.80	3.80	4.90	-	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22	
14	14	24	-	-	-	3.37	3.37	5.76	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
14	18	18	-	-	-	3.50	4.50	4.50	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
14	18	24	-	-	-	3.13	4.02	5.35	-	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26	
14	24	24	-	-	-	2.82	4.84	4.84	-	-	-	12.5 (3.5-14.0)	3.80 (0.8-4.84)	3.29	
18	18	18	-	-	-	4.17	4.17	4.17	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
18	18	24	-	-	-	3.75	3.75	5.00	-	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28	
18	24	14	-	-	-	2.00	2.00	2.00	4.00	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	4.00	
7	7	7	18	-	-	2.00	2.00	2.00	5.00	-	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59	
7	7	7	24	-	-	1.94	1.94	1.94	6.68	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7	7	9	12	-	-	2.00	2.00	2.50	3.50	-	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00	
7	7	9	18	-	-	2.00	2.00	2.50	5.00	-	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76	
7	7	9	24	-	-	2.00	2.00	2.50	7.00	-	-	11.5 (3.5-12.7)	3.33 (0.8-4.27)	3.45	
7	7	12	12	-	-	1.86	1.86	2.39	6.39	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7	7	12	18	-	-	2.00	2.00	3.50	3.50	-	-	11.0 (3.5-12.1)	3.00 (0.8-3.70)	3.67	
7	7	12	24	-	-	2.00	2.00	3.50	4.00	-	-	11.5 (3.5-12.7)	3.27 (0.8-4.08)	3.52	
7	7	12	18	-	-	2.00	2.00	3.50	5.00	-	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31	
7	7	12	24	-	-	1.75	1.75	3.00	6.00	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	7	14	14	-	-	2.00	2.00	4.00	4.00	-	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42	
7	7	14	18	-	-	1.90	1.90	3.80	4.90	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7	7	14	24	-	-	1.68	1.68	3.37	5.77	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	7	18	18	-	-	1.75	1.75	4.50	4.50	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.34	
7	7	18	24	-	-	1.56	1.56	4.02	5.36	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7	7	24	24	-	-	1.41	1.41	4.84	4.84	-	-	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41	
7	9	9	9	-	-	2.00	2.50	2.50	2.50	-	-	9.5 (3.5-10.8)	2.31 (0.8-2.93)	4.11	
7	9	9	12	-	-	2.00	2.50	2.50	3.50	-	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76	
7	9	9	18	-	-	2.00	2.50	2.50	4.00	-	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59	
7	9	9	24	-	-	2.00	2.50	2.50	5.00	-	-	12.0 (3.5-13.7)	3.57 (0.8-4.65)	3.36	
7	9	9	12	12	-	-	1.79	2.30	2.30	6.11	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	9	9	12	18	-	-	2.00	2.50	3.50	3.50	-	11.5 (3.5-12.7)	3.27 (0.8-4.08)	3.52	
7	9	9	12	24	-	-	1.90	3.33	3.50	4.00	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42	
7	9	9	12	18	-	-	1.90	2.45	3.26	4.89	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7	9	9	12	24	-	-	1.68	2.16	2.88	5.78	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	9	9	14	14	-	-	2.00	2.50	4.00	4.00	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31	
7	9	9	14	18	-	-	1.82	2.28	3.00	4.69	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7	9	9	14	24	-	-	1.62	2.08	3.56	5.56	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7	9	9	18	18	-	-	1.68	2.16	4.33	4.33	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	9	9	18	24	-	-	1.51	1.94	3.88	5.17	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39	
7	9	9	12	12	12	-	1.90	3.50	3.50	3.50	-	12.4 (3.5-13.7)	3.69 (0.8-4.65)	3.36	
7	9	9	12	12	18	-	1.82	3.33	3.90	3.90	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	9	9	12	18	18	-	1.79	3.06	3.06	4.59	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	9	9	12	12	24	-	1.59	2.73	2.73	5.45	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7	9	9	12	14	14	-	1.87	3.19	3.72	3.72	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7	9	9	12	14	18	-	1.72	2.94	3.43	4.41	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7	9	9	12	14	24	-	1.56	2.63	3.07	5.26	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7	9	9	12	18	18	-	1.59	2.73	4.09	4.09	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7	9	9	12	18	24	-	1.43	2.46	3.69	4.92	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40	
7	9	9	14	14	14	-	1.79	3.57	3.57	3.57	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7	9	9	14	14	18	-	1.62	3.30	3.90	4.35	-	12.5 (3.5-14.0)	3.72 (0.8-4.84)	3.32	
7	9	9	14	14	24	-	1.48	2.97	2.97	5.08	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39	
7	9	9	14	18	18	-	1.53	3.07	3.95	3.95	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7	9	9	14	18	18	-	1.43	3.69	3.69	3.69	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40	

AOYGASLBLAG	Combination of indoor unit						Cooling Operation							EER (W/W)
							Cooling Capacity							
	Unit1	Unit2	Unit3	Unit4	Unit5	Unit6	Unit1	Unit2	Unit3	Unit4	Unit5	Unit6	Total (Min.-Max.)	
2-unit connection	9	9												

6-unit Multi-split Combination Table-Cooling/Heating

6-unit Multi-split cooling

AOYGASLBLAG	Combination of indoor unit						Cooling Operation							EER (HW)	
							Cooling Capacity								Input Power (Min.-Max.)
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Total (Min.-Max.)	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6		
5-unit connection	7	9	12	12	12	-	1.69	2.17	2.88	2.88	2.88	-	12.5 (3.5-14.0)	3.61 (0.8-4.84)	3.47
	7	9	12	12	14	-	1.62	2.08	2.78	2.78	3.24	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.46
	7	9	12	12	18	-	1.51	1.94	2.59	2.59	3.87	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50
	7	9	12	14	14	-	1.55	2.01	2.68	3.13	3.13	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48
	7	9	12	14	18	-	1.46	1.88	2.50	2.92	3.74	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51
	7	9	14	14	14	-	1.50	1.94	3.02	3.02	3.02	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50
	7	9	14	14	18	-	1.41	1.81	2.82	2.82	3.64	-	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52
	7	12	12	12	12	-	1.58	2.73	2.73	2.73	2.73	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48
	7	12	12	12	14	-	1.54	2.63	2.63	2.63	3.07	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49
	7	12	12	12	18	-	1.43	2.46	2.46	2.46	3.69	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51
	7	12	12	14	14	-	1.48	2.54	2.54	2.97	2.97	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50
	7	12	14	14	14	-	1.43	2.46	2.87	2.87	2.87	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51
	9	9	9	9	9	-	2.50	2.50	2.50	2.50	2.50	-	12.5 (3.5-14.0)	3.65 (0.8-4.84)	3.42
	9	9	9	9	12	-	2.34	2.34	2.34	2.34	3.14	-	12.5 (3.5-14.0)	3.64 (0.8-4.84)	3.43
	9	9	9	9	14	-	2.25	2.25	2.25	2.25	3.50	-	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45
	9	9	9	9	18	-	2.08	2.08	2.08	4.18	4.18	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47
	9	9	9	9	24	-	1.88	1.88	1.88	1.88	4.98	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.51
	9	9	9	12	14	-	2.12	2.12	2.12	2.83	3.31	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47
	9	9	9	12	18	-	1.97	1.97	1.97	2.63	3.96	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49
	9	9	9	14	14	-	2.05	2.05	2.05	3.18	3.18	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48
	9	9	9	14	18	-	1.91	1.91	1.91	2.87	3.80	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50
	9	9	12	12	12	-	2.08	2.08	2.78	2.78	2.98	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.50
	9	9	12	12	14	-	2.01	2.01	2.68	2.68	3.12	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48
	9	9	12	12	18	-	1.88	1.88	2.50	2.50	3.74	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51
9	9	12	14	14	-	1.94	1.94	2.58	3.02	3.02	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
9	9	12	14	18	-	1.81	1.81	2.42	2.82	3.24	-	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
9	9	14	14	14	-	1.87	1.87	2.92	2.92	3.92	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
9	12	12	12	12	-	1.98	2.63	2.63	2.63	2.63	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49	
9	12	12	12	14	-	1.91	2.54	2.54	2.54	2.97	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
9	12	12	14	14	-	1.84	2.46	2.46	2.87	2.87	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
12	12	12	12	12	-	2.50	2.50	2.50	2.50	2.50	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
12	12	12	12	14	-	2.42	2.42	2.42	2.42	2.82	-	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
7	7	7	7	7	7	9	2.00	2.00	2.00	2.00	2.00	12.0 (3.5-13.4)	3.32 (0.8-4.46)	3.61	
7	7	7	7	7	9	9	2.00	2.00	2.00	2.00	2.50	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
7	7	7	7	7	12	12	1.86	1.86	1.86	1.86	3.20	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
7	7	7	7	7	14	14	1.79	1.79	1.79	1.79	3.55	12.5 (3.5-14.0)	3.54 (0.8-4.84)	3.53	
7	7	7	7	7	18	18	1.65	1.65	1.65	1.65	4.25	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7	7	7	7	7	24	24	1.48	1.48	1.48	1.48	5.10	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	7	7	9	9	9	1.90	1.90	1.90	1.90	2.45	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
7	7	7	7	9	12	12	1.81	1.81	1.81	1.81	2.29	12.5 (3.5-14.0)	3.54 (0.8-4.84)	3.53	
7	7	7	7	9	14	14	1.72	1.72	1.72	1.72	2.20	12.5 (3.5-14.0)	3.53 (0.8-4.84)	3.54	
7	7	7	7	9	18	18	1.59	1.59	1.59	1.59	2.05	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7	7	7	7	9	24	24	1.43	1.43	1.43	1.43	1.85	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7	7	7	7	12	12	12	1.68	1.68	1.68	1.68	2.89	12.5 (3.5-14.0)	3.52 (0.8-4.84)	3.55	
7	7	7	7	12	14	14	1.61	1.61	1.61	1.61	2.78	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7	7	7	7	12	18	18	1.51	1.51	1.51	1.51	2.59	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	7	7	14	14	14	1.56	1.56	1.56	1.56	3.13	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7	7	7	7	14	18	18	1.46	1.46	1.46	1.46	2.92	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7	7	7	9	9	9	9	1.82	1.82	1.82	2.34	2.34	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
7	7	7	9	9	12	12	1.72	1.72	1.72	2.21	2.21	12.5 (3.5-14.0)	3.53 (0.8-4.84)	3.54	
7	7	7	9	9	14	14	1.65	1.65	1.65	2.12	2.12	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7	7	7	9	9	18	18	1.54	1.54	1.54	1.97	1.97	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
7	7	7	9	12	12	12	1.62	1.62	1.62	2.08	2.78	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7	7	7	9	12	14	14	1.66	1.66	1.66	1.66	2.54	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	7	9	12	18	18	1.46	1.46	1.46	1.88	2.50	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7	7	7	9	14	14	14	1.51	1.51	1.51	1.93	3.02	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	7	12	12	12	12	1.54	1.54	1.54	2.63	2.63	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
7	7	7	12	14	14	14	1.48	1.48	1.48	2.54	2.54	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	9	9	9	9	9	1.75	1.75	2.25	2.25	2.25	12.5 (3.5-14.0)	3.53 (0.8-4.84)	3.54	
7	7	9	9	9	12	12	1.65	1.65	2.12	2.12	2.12	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7	7	9	9	9	14	14	1.59	1.59	2.05	2.05	2.05	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7	7	9	9	9	18	18	1.48	1.48	1.91	1.91	1.91	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	9	9	12	12	12	1.56	1.56	2.01	2.01	2.68	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7	7	9	9	12	14	14	1.51	1.51	1.94	1.94	2.59	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	9	9	12	18	18	1.41	1.41	1.81	1.81	2.42	12.5 (3.5-14.0)	3.46 (0.8-4.84)	3.61	
7	7	9	9	14	14	14	1.46	1.46	1.88	1.88	2.91	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7	7	9	9	12	12	12	1.48	1.48	1.92	2.54	2.54	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	7	9	12	12	14	14	1.43	1.43	1.85	2.46	2.46	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7	7	12	12	12	12	12	1.41	1.41	2.42	2.42	2.42	12.5 (3.5-14.0)	3.46 (0.8-4.84)	3.61	
7	9	9	9	9	9	9	1.70	2.16	2.16	2.16	2.16	12.5 (3.5-14.0)	3.52 (0.8-4.84)	3.55	
7	9	9	9	9	12	12	1.68	2.05	2.05	2.05	2.71	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7	9	9	9	9	14	14	1.54	1.97	1.97	1.97	3.08	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
7	9	9	9	12	12	12	1.50	1.94	1.94	1.94	2.59	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7	9	9	9	12	14	14	1.46	1.88	1.88	1.88	2.50	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7	9	9	12	12	12	12	1.44	1.84	1.84	2.46	2.46	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
9	9	9	9	9	9	9	2.08	2.08	2.08	2.08	2.08	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
9	9	9	9	9	12	12	1.97	1.97	1.97	1.97	2.65	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
9	9	9	9	12	12	12	1.88	1.88	1.88	1.88	2.49	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	

Note: *7: 7,000 Btu/h; 9: 9,000 Btu/h; 12: 12,000 Btu/h; 14: 14,000 Btu/h; 18: 18,000 Btu/h; 24: 24,000 Btu/h
 •The above is the value for connecting with Wall Mounted type.
 •2 or more indoor units should be connected.
 •Cooling capacity is based on 27°CDB/19°CWB (Indoor temperature), 35°CDB (outdoor temperature).
 •Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
 •The Total ability of connected indoor unit is up to 54000 Btu from 27000 Btu.

6-unit Multi-split heating


















































AOYGASLBLAG	Combination of indoor unit						Heating Operation							COP (HW)	
							Heating Capacity								Input Power (Min.-Max.)
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Total (Min.-Max.)	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6		
2-unit connection	12	24	-	-	-	-	4.07	8.13	-	-	-	-	12.2 (3.5-13.1)	3.41 (0.7-3.54)	3.58
	12	24	-	-	-	-	4.61	7.89	-	-	-	-	12.5 (3.5-13.8)	3.56 (0.7-3.76)	3.51
	18	18	-	-	-	-	6.10	6.10	-	-	-	-	12.2 (3.5-13.		

6-unit Multi-split Combination Table-Heating

6-unit Multi-split heating

AOYGASLBLAG	Combination of indoor unit						Heating Operation							COP (W/W)	
							Heating Capacity						Input Power (Min.-Max.)		COP (W/W)
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6			
9	9	9	9	9	9	9	3.05	3.05	3.05	3.05	-	-	12.2 (3.5-13.1)	3.09 (0.73-5.54)	3.95
9	9	9	12	-	-	-	2.93	2.93	2.93	3.91	-	-	12.7 (3.5-14.2)	3.35 (0.73-8.7)	3.79
9	9	9	14	-	-	-	2.85	2.85	2.85	4.45	-	-	13 (3.5-14.9)	3.46 (0.74-9.9)	3.76
9	9	9	18	-	-	-	2.70	2.70	2.70	5.60	-	-	13.5 (3.5-16.0)	3.61 (0.74-11)	3.74
9	9	9	24	-	-	-	2.38	2.38	2.38	6.36	-	-	13.5 (3.5-16.0)	3.59 (0.74-11)	3.76
9	9	12	12	-	-	-	2.83	2.83	3.77	3.77	-	-	13.2 (3.5-15.3)	3.52 (0.74-10)	3.75
9	9	12	14	-	-	-	2.76	2.76	3.68	4.30	-	-	13.5 (3.5-16.0)	3.61 (0.74-11)	3.74
9	9	12	18	-	-	-	2.53	2.53	3.38	5.06	-	-	13.5 (3.5-16.0)	3.60 (0.74-11)	3.75
9	9	12	24	-	-	-	2.25	2.25	3.00	6.00	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
9	9	14	14	-	-	-	2.64	2.64	4.11	4.11	-	-	13.5 (3.5-16.0)	3.61 (0.74-11)	3.74
9	9	14	18	-	-	-	2.43	2.43	3.78	4.86	-	-	13.5 (3.5-16.0)	3.60 (0.74-11)	3.75
9	9	14	24	-	-	-	2.17	2.17	3.38	5.78	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
9	9	18	18	-	-	-	2.25	2.25	4.50	4.50	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
9	9	18	24	-	-	-	2.03	2.03	4.05	5.39	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
9	12	12	12	-	-	-	2.70	3.60	3.60	3.60	-	-	13.5 (3.5-16.0)	3.61 (0.74-11)	3.74
9	12	12	14	-	-	-	2.59	3.45	3.45	4.01	-	-	13.5 (3.5-16.0)	3.60 (0.74-11)	3.75
9	12	12	18	-	-	-	2.38	3.18	3.18	4.76	-	-	13.5 (3.5-16.0)	3.59 (0.74-11)	3.76
9	12	12	24	-	-	-	2.13	2.84	2.84	5.69	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
9	12	14	14	-	-	-	2.48	3.30	3.86	3.86	-	-	13.5 (3.5-16.0)	3.60 (0.74-11)	3.75
9	12	14	18	-	-	-	2.29	3.06	3.57	4.58	-	-	13.5 (3.5-16.0)	3.59 (0.74-11)	3.76
9	12	14	24	-	-	-	2.06	2.75	3.20	5.49	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
9	14	14	14	-	-	-	2.73	2.85	4.26	4.26	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
9	14	14	18	-	-	-	2.37	3.71	3.71	3.71	-	-	13.5 (3.5-16.0)	3.59 (0.74-11)	3.76
9	14	14	24	-	-	-	2.21	3.44	3.44	4.41	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
9	14	18	14	-	-	-	1.99	3.10	3.10	5.31	-	-	13.5 (3.5-16.0)	3.56 (0.74-11)	3.79
9	14	18	18	-	-	-	2.06	3.20	4.12	4.12	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
12	12	12	12	-	-	-	3.38	3.38	3.38	3.38	-	-	13.5 (3.5-16.0)	3.60 (0.74-11)	3.75
12	12	12	14	-	-	-	3.24	3.24	3.24	3.78	-	-	13.5 (3.5-16.0)	3.60 (0.74-11)	3.75
12	12	12	18	-	-	-	3.00	3.00	3.00	4.50	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
12	12	12	24	-	-	-	2.70	2.70	2.70	5.40	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
12	12	14	14	-	-	-	3.12	3.12	3.63	3.63	-	-	13.5 (3.5-16.0)	3.59 (0.74-11)	3.76
12	12	14	18	-	-	-	2.89	2.89	3.38	4.34	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
12	12	14	24	-	-	-	2.61	2.61	3.05	5.23	-	-	13.5 (3.5-16.0)	3.56 (0.74-11)	3.79
12	12	18	18	-	-	-	2.70	2.70	4.05	4.05	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
12	14	14	14	-	-	-	3.00	3.50	3.50	3.50	-	-	13.5 (3.5-16.0)	3.58 (0.74-11)	3.77
12	14	14	18	-	-	-	2.79	3.28	3.28	4.29	-	-	13.5 (3.5-16.0)	3.57 (0.74-11)	3.78
12	14	18	18	-	-	-	2.61	3.05	3.92	3.92	-	-	13.5 (3.5-16.0)	3.56 (0.74-11)	3.79
7	7	7	7	7	7	7	2.40	2.40	2.40	2.40	2.40	-	12.0 (3.5-12.7)	2.82 (0.73-4.4)	4.26
7	7	7	7	7	7	9	2.33	2.33	2.33	2.33	2.98	-	12.3 (3.5-13.5)	3.03 (0.73-5.5)	4.06
7	7	7	7	7	12	-	2.24	2.24	2.24	2.24	3.84	-	12.8 (3.5-14.5)	3.29 (0.73-9.8)	3.89
7	7	7	7	12	12	-	2.20	2.20	2.20	2.20	4.40	-	13.2 (3.5-15.3)	3.40 (0.74-10)	3.88
7	7	7	7	18	-	-	2.05	2.05	2.05	2.05	5.30	-	13.5 (3.5-16.0)	3.49 (0.74-11)	3.87
7	7	7	7	24	-	-	1.82	1.82	1.82	1.82	6.22	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.89
7	7	7	9	9	-	-	2.28	2.28	2.28	2.93	2.93	-	12.7 (3.5-14.2)	3.23 (0.73-8.7)	3.93
7	7	7	9	12	-	-	2.20	2.20	2.20	2.83	3.77	-	13.2 (3.5-15.3)	3.40 (0.74-10)	3.88
7	7	7	9	14	-	-	2.15	2.15	2.15	2.76	4.29	-	13.5 (3.5-16.0)	3.49 (0.74-11)	3.87
7	7	7	9	18	-	-	1.97	1.97	1.97	2.53	5.06	-	13.5 (3.5-16.0)	3.48 (0.74-11)	3.88
7	7	7	9	24	-	-	1.75	1.75	1.75	2.25	6.00	-	13.5 (3.5-16.0)	3.46 (0.74-11)	3.90
7	7	7	12	12	-	-	2.10	2.10	2.10	3.60	3.60	-	13.5 (3.5-16.0)	3.49 (0.74-11)	3.87
7	7	7	12	14	-	-	2.01	2.01	2.01	4.05	4.05	-	13.5 (3.5-16.0)	3.48 (0.74-11)	3.88
7	7	7	12	18	-	-	1.85	1.85	1.85	3.18	4.77	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.89
7	7	7	12	24	-	-	1.66	1.66	1.66	2.84	5.68	-	13.5 (3.5-16.0)	3.45 (0.74-11)	3.91
7	7	7	14	14	-	-	1.93	1.93	1.93	3.86	3.86	-	13.5 (3.5-16.0)	3.48 (0.74-11)	3.88
7	7	7	14	18	-	-	1.78	1.78	1.78	3.57	4.59	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.89
7	7	7	14	24	-	-	1.60	1.60	1.60	3.20	5.50	-	13.5 (3.5-16.0)	3.45 (0.74-11)	3.91
7	7	7	18	18	-	-	1.66	1.66	1.66	4.26	4.26	-	13.5 (3.5-16.0)	3.45 (0.74-11)	3.91
7	7	9	9	9	-	-	2.22	2.22	2.85	2.85	2.85	-	13.0 (3.5-14.9)	3.34 (0.74-9.9)	3.89
7	7	9	9	12	-	-	2.15	2.15	2.76	2.76	3.68	-	13.5 (3.5-16.0)	3.49 (0.74-11)	3.87
7	7	9	9	18	-	-	2.05	2.05	2.64	2.64	4.12	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.87
7	7	9	9	24	-	-	1.69	1.69	2.17	2.17	5.78	-	13.5 (3.5-16.0)	3.46 (0.74-11)	3.90
7	7	9	12	12	-	-	2.01	2.01	2.58	3.45	3.45	-	13.5 (3.5-16.0)	3.48 (0.74-11)	3.88
7	7	9	12	14	-	-	1.93	1.93	2.48	3.31	3.85	-	13.5 (3.5-16.0)	3.48 (0.74-11)	3.88
7	7	9	12	18	-	-	1.78	1.78	2.29	3.06	4.02	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.89
7	7	9	12	24	-	-	1.60	1.60	2.06	2.75	5.49	-	13.5 (3.5-16.0)	3.45 (0.74-11)	3.91
7	7	9	14	14	-	-	1.85	1.85	2.38	3.71	3.71	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.89
7	7	9	14	18	-	-	1.72	1.72	2.21	3.44	4.41	-	13.5 (3.5-16.0)	3.46 (0.74-11)	3.90
7	7	9	14	24	-	-	1.55	1.55	1.99	3.10	5.31	-	13.5 (3.5-16.0)	3.44 (0.74-11)	3.92
7	7	9	18	18	-	-	1.60	1.60	2.05	4.12	4.12	-	13.5 (3.5-16.0)	3.45 (0.74-11)	3.91
7	7	12	12	12	-	-	1.89	1.89	3.24	3.24	3.24	-	13.5 (3.5-16.0)	3.48 (0.74-11)	3.88
7	7	12	12	14	-	-	1.82	1.82	3.12	3.12	3.62	-	13.5 (3.5-16.0)	3.47 (0.74-11)	3.89
7	7	12	12	18	-	-	1.69	1.69	2.89	2.89	4.34	-	13.5 (3.5-16.0)	3.46 (0.74-11)	3.90
7	7	12	14	14	-	-	1.52	1.52	2.12	3.44	4.41	-	13.5 (3.5-16.0)	3.44 (0.74-11)	3.92
7	7	12	14	18	-	-	1.75	1.75	3.00	3.50	3.50	-	13.5 (3.5-16.0)	3.46 (0.74-11)	3.90
7	7	12	14	24	-	-	1.63	1.63	2.79	3.26	4.19	-	13.5 (3.5-16.0)	3.45 (0.74-11)	3.91
7	7	12	18	18	-	-	1.52	1.52	2.62	3.92	3.92	-	13.5 (3.5-16.0)	3.44 (0.74-11)	3.92
7	7	14	14	14	-	-	1.68	1.68	3.38	3.38	3.38	-	13.5 (3.5-16.0)	3.46 (0.74-11)	3.90
7	7	14													

Feature Summary

Type	Wall Mounted					Compact Cassette ^{4*}	Floor ^{5*}	Floor/Ceiling ^{5*}	Slim Duct		Mini Duct ^{5*}
Model No.											
Refrigerant											
 Economy mode  Room temperature set point limitation  Set temperature auto return	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
 Power diffuser  Powerful mode  10°C HEAT operation  Low noise mode  Auto-changeover  Up/down swing flaps  Double swing automatic  Automatic fan speed  Auto restart  Connectable fresh air duct  Fresh air intake	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
 Auto off timer  Sleep timer  Program timer  Weekly timer  Weekly + setback timer  Filter sign  External error output  External ON/OFF input  Wireless LAN control	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
 Ion deodorization filter  Apple-catechin filter  Washable panel	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
 Drain pump as standard	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

*1: ASYG07/09/12/14LMCA is for 5-unit, 6-unit multi-split only.
 *2: ASYG14LUCA is for 5-unit, 6-unit multi-split only.
 *3: ASYG18/24LFCA and ASYG24LFCC are for 5-unit, 6-unit multi-split only.

*4: AUYG07/09LVLA and AUYG12/14/18LVLB are for 5-unit, 6-unit multi-split only.
 *5: 5-unit, 6-unit multi-split only

○ : Optional function